

東芝照明器具配光データシート


名 称	蛍光灯器具
形 名	FT-22305-SL 15

名 称	蛍光灯ランプ
形 名	FL20SS・EX-N /18-Z
光 束	1550 lm × 2

前 面	
反射面	塗装 (白)

良	0.74
中	0.70
否	0.61

F 	18 %
F 	70 %
F 	88 %
器具 光束	2748 lm

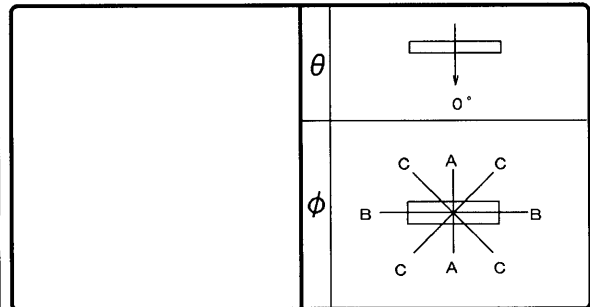

最大取付間隔	
A-A	1.5 H
B-B	1.3 H

備 考	
--------	--

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	166	166	166
10°	161	166	166
20°	161	156	161
30°	161	141	154
40°	159	121	145
50°	153	97	133
60°	145	71	116
70°	144	43	103
80°	116	17	89
90°	81	0	55
100°	75	0	47
110°	65	0	44
120°	62	0	40
130°	55	0	27
140°	36	0	14
150°	17	0	0
160°	2	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		48	44	35	33	27	26	46	42	34	32	26	26	31	30	24	24	23	22	18	16		
0.80		58	52	44	42	36	34	55	50	42	40	34	33	39	37	32	31	30	29	24	21		
1.00		64	57	51	47	42	39	60	55	48	45	40	38	44	42	37	36	34	33	28	25		
1.25		71	63	58	53	48	45	66	60	55	51	46	44	50	47	43	41	39	38	33	29		
1.50		75	66	63	57	54	50	70	63	60	55	51	48	54	50	47	45	43	42	37	33		
2.00		82	72	71	64	63	57	77	68	68	61	60	55	61	57	55	51	50	48	43	39		
2.50		87	75	77	68	69	62	81	72	73	65	65	60	65	60	59	56	54	52	47	43		
3.00		90	77	81	71	73	66	85	74	77	68	70	63	69	63	63	59	57	55	50	46		
4.00		95	80	87	75	80	71	89	77	82	72	76	68	73	67	69	64	62	59	55	50		
5.00		97	82	91	78	85	74	91	79	86	75	81	71	76	70	72	67	65	62	58	53		
10.00		104	87	100	84	96	82	97	83	94	81	91	79	84	75	81	74	73	69	65	60		

