

東芝照明器具配光データシート


名 称	東芝蛍光灯器具
形 名	BFD21805SEL

名 称	ネオボールZ
形 名	EFD25EL/20-PDS
光 束	1450 lm × 1

前 面	バツフル (バージンホワイト)
反射面	塗装 (バージンホワイト)

良	0.70
中	0.66
否	0.58

F	0%
F	41%
F	41%
器具 光束	588 lm

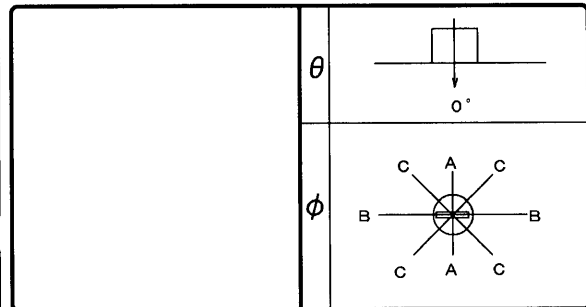

最大取付間隔	E26ソケット
A-A	1.4 H
B-B	1.3 H

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	149	149	149
10°	151	147	149
20°	150	145	147
30°	142	135	138
40°	122	116	120
50°	90	87	90
60°	55	52	54
70°	23	22	24
80°	8	7	7
90°	0	1	1
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井			80			70			50			30			20			0		
	壁	床	天井	70	50	30	70	50	30	50	30	50	30	30	10	30	10	10	0	10	0
室指数	照 明 率 (×0.01)																				
0.60	26	24	21	20	17	17	25	24	20	19	17	17	20	19	17	16	17	16	15	14	14
0.80	31	28	26	24	22	21	31	28	25	24	22	21	25	24	22	21	21	21	19	18	18
1.00	34	31	29	27	25	24	33	30	28	27	25	24	27	26	25	24	24	23	22	21	21
1.25	37	33	32	30	29	27	36	33	32	29	29	27	31	29	28	27	27	26	24	24	24
1.50	39	35	35	32	31	29	38	34	34	31	31	29	33	31	30	28	29	28	26	26	26
2.00	43	37	39	35	36	32	41	37	38	34	35	32	36	33	34	32	32	31	30	29	29
2.50	45	38	41	36	38	34	43	38	40	36	37	34	38	35	36	33	34	33	32	31	31
3.00	46	39	43	37	40	36	44	39	42	37	39	35	39	36	37	35	36	34	33	32	32
4.00	48	40	45	39	43	38	46	40	44	38	42	37	41	38	40	37	38	36	35	34	34
5.00	49	41	46	40	45	39	47	40	45	39	43	38	42	38	41	38	39	37	36	35	35
10.00	51	42	49	42	48	41	49	42	48	41	47	41	45	40	44	40	41	39	38	37	37

