


■ 東芝ランプ 配光データシート

名 称	LED電球
形 名	LDA7N
光 束	600 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

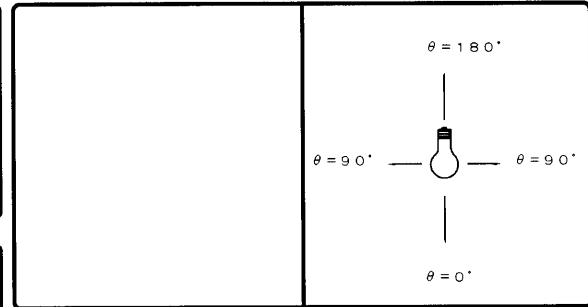

効 率	F	%
	F	%
	F	100 %
	器具 光束	600 lm

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備 考	
--------	--

光度 (cd/1000lm)			
θ	ϕ	A-A	B-B
0°		269	
10°		265	
20°		253	
30°		235	
40°		209	
50°		178	
60°		141	
70°		103	
80°		68	
90°		43	
100°		27	
110°		17	
120°		11	
130°		7	
140°		3	
150°		1	
160°		0	
170°		0	
180°		0	

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		57	52	42	40	33	32	54	50	40	39	32	31	38	37	31	30	29	29	24	22		
0.80		67	61	52	49	42	40	64	59	50	48	41	40	47	45	39	38	38	37	32	29		
1.00		76	68	61	57	51	48	73	66	59	55	50	47	56	53	47	46	45	44	39	36		
1.25		84	74	69	63	59	55	80	72	67	62	57	54	62	59	55	52	52	50	45	42		
1.50		89	79	76	69	66	61	85	76	73	67	64	60	68	64	60	57	57	55	50	47		
2.00		98	85	85	76	76	69	93	82	82	74	74	68	76	71	69	65	65	63	58	54		
2.50		103	89	92	81	83	75	98	86	88	79	80	73	82	75	75	70	71	68	63	60		
3.00		106	91	97	85	88	79	101	89	93	83	85	77	86	79	80	74	75	71	67	63		
4.00		111	95	103	89	96	84	106	92	99	87	93	83	91	83	86	79	80	76	72	69		
5.00		114	97	107	92	101	88	109	94	103	90	97	86	94	86	90	83	84	80	76	72		
10.00		121	101	117	99	113	96	115	99	112	96	108	94	102	92	100	90	92	87	84	80		

