

東芝照明器具配光データシート


名 称	蛍光灯器具
形 名	FHR-33122K-PR9

名 称	蛍光ランプ
形 名	FHP32EN.
光 束	2600 lm × 3

前 面	ルーバー（銀色）
反射面	高反射塗装（白）

保守率	良	0.73
	中	0.69
	否	0.61

効 率	F 	0 %
	F 	65 %
	F 	65 %
	器具 光束	5092 lm

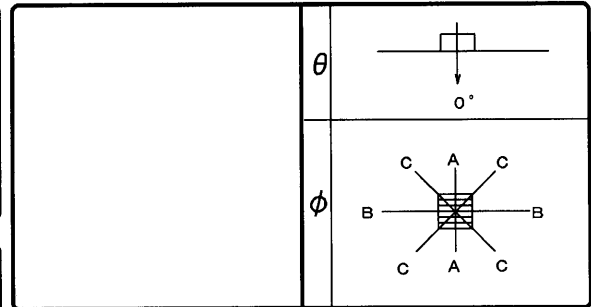

最大取付間隔	
A-A	1.2 H
B-B	1.1 H
備考	

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	381	381	381
10°	377	374	378
20°	354	343	352
30°	299	289	300
40°	195	217	218
50°	80	133	115
60°	21	47	32
70°	2	1	3
80°	1	1	1
90°	1	1	1
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80						70						50						30			20	0
	壁	70		50		30		70		50		30		50		30		30			10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
室指数		照 明 率 (×0.01)																						
0.60		49	45	41	39	37	36	48	45	41	39	36	35	40	38	36	35	36	35	33	32			
0.80		58	52	50	47	46	44	56	52	50	47	45	43	48	46	44	43	44	43	41	40			
1.00		62	55	55	51	50	47	60	55	54	50	49	47	52	49	48	47	47	46	44	43			
1.25		66	58	59	54	55	51	64	58	58	54	54	51	56	53	53	50	51	50	48	47			
1.50		69	60	62	57	58	54	67	60	61	56	57	54	59	55	56	53	54	52	50	49			
2.00		73	63	68	60	64	58	71	63	66	60	62	58	63	59	60	57	58	56	54	53			
2.50		75	65	71	62	67	60	73	64	69	62	65	60	66	61	63	59	61	58	57	55			
3.00		77	66	73	64	69	62	74	65	71	63	68	61	67	62	65	60	62	60	58	57			
4.00		79	67	76	65	73	64	76	66	73	65	71	63	69	63	67	62	64	61	60	59			
5.00		80	68	77	66	75	65	77	67	75	66	73	64	71	64	69	63	66	62	61	60			
10.00		83	69	81	68	80	68	80	68	78	68	77	67	73	66	72	66	68	64	63	62			

