


東芝照明器具配光データシート

名 称	蛍光灯器具
形 名	FHR-33101-P R9

保 守 率	良	0.73
	中	0.69
	否	0.61

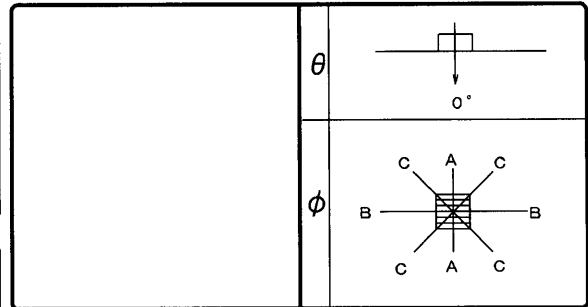

光 源	名 称	蛍光ランプ
	形 名	FHP32EN
	光 束	2600 lm × 3

効 率	F	0 %
	F	80 %
	F	80 %
	器具 光束	6245 lm

最大取付間隔	
A-A	1.3 H
B-B	1.2 H

前 面	
反射面	高反射塗装 (白)

備 考	
--------	--

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	342	342	342
10°	341	331	336
20°	336	305	319
30°	309	267	291
40°	244	219	244
50°	144	162	172
60°	70	103	89
70°	39	48	41
80°	17	17	17
90°	1	1	1
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0	
室指数		照 明 率 (×0.01)																					
0.60		54	50	43	41	37	36	53	49	43	41	37	35	41	40	36	35	35	35	32	30		
0.80		64	58	54	50	47	45	62	57	53	50	47	45	51	49	46	44	45	44	41	39		
1.00		70	63	60	55	53	50	68	61	58	55	52	50	56	53	51	49	50	48	45	44		
1.25		76	67	66	61	59	56	73	66	65	60	58	55	62	59	57	54	55	54	51	49		
1.50		79	70	71	64	64	59	77	69	69	63	63	59	66	62	61	58	59	57	54	53		
2.00		86	74	78	70	72	66	83	73	76	69	71	65	72	67	68	64	66	63	60	59		
2.50		89	77	82	73	77	69	86	76	80	72	75	69	76	70	72	67	69	66	64	62		
3.00		91	78	85	75	80	72	88	77	83	74	79	71	79	72	75	70	72	69	66	65		
4.00		95	80	90	78	86	75	91	79	87	77	83	75	82	75	79	73	75	72	70	68		
5.00		97	82	92	79	89	77	93	81	90	78	86	77	84	77	82	75	78	74	72	70		
10.00		101	84	98	83	96	82	97	83	95	82	93	81	89	80	87	79	82	78	76	75		

