


東芝ランプ 配光データシート

名称	LED電球
形名	LDA5L/WD
光束	220 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

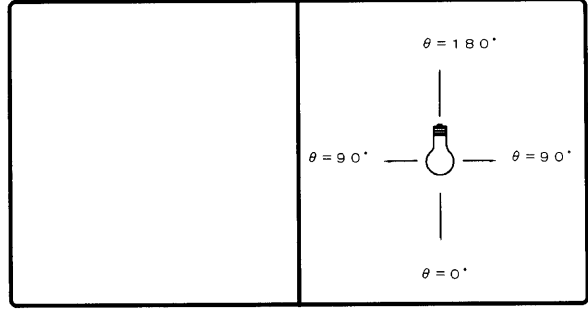

効率	F $\frac{\text{半}}{\text{球}}$	%
	F $\frac{\text{半}}{\text{半}}$	%
	F $\frac{\text{半}}{\text{直}}$	100 %
	器具光束	220 lm

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考
データは初期の標準値です。

光度 (cd/1000lm)			
θ	A-A	B-B	C-C
0°	224		
10°	221		
20°	213		
30°	198		
40°	179		
50°	156		
60°	130		
70°	105		
80°	82		
90°	61		
100°	45		
110°	32		
120°	23		
130°	16		
140°	8		
150°	1		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井		80				70				50				30	20	0			
	壁	床	70	50	30	70	50	30	50	30	50	30	30	10	0					
室指数	照 明 率 (×0.01)																			
0.60	55	50	40	38	31	30	52	48	38	36	30	29	35	34	28	27	26	26	21	18
0.80	65	59	49	46	40	38	61	56	48	45	38	37	44	42	36	35	34	33	28	25
1.00	74	66	58	54	48	45	70	63	56	52	46	44	51	49	43	42	41	39	34	31
1.25	81	72	66	60	56	52	76	69	63	58	54	51	58	55	50	48	47	45	40	36
1.50	86	76	72	66	62	58	82	73	69	63	60	56	63	59	56	53	52	50	44	40
2.00	94	82	82	73	72	66	89	79	78	71	69	64	71	66	64	60	59	57	51	47
2.50	100	86	88	78	79	71	94	83	84	75	76	69	76	71	70	65	64	62	56	52
3.00	103	89	93	82	85	75	98	85	89	79	81	73	80	74	74	69	68	65	60	56
4.00	108	92	100	86	92	81	102	89	95	84	88	79	86	78	80	74	74	70	65	61
5.00	111	94	104	89	97	85	105	91	99	87	93	82	89	81	85	78	77	73	69	64
10.00	118	99	114	96	110	93	112	96	108	93	104	91	97	88	94	86	86	81	77	72

