


東芝照明器具配光データシート

名 称	LEDシーリング
形 名	LEDH81003-LC

効 率	F 	15 %	保 守 率	良	0.63
	F 	85 %		中	0.60
	F 	100 %		否	0.56
	器具 光束	3840 lm			

前 面	カバー（乳白）	最大取付間隔	A-A	1.3 H
反射面	塗装（白）		B-B	1.3 H

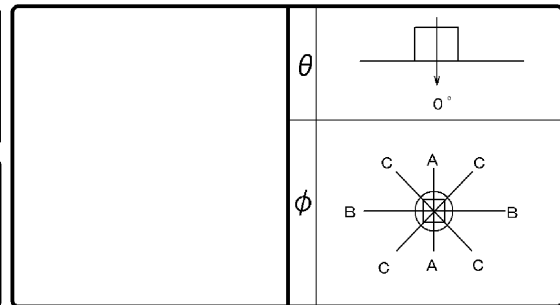

備 考	
--------	--

光度 (cd/1000lm)				反 射 率 (%)	天井	80						70						50						30		20	0		
$\theta \backslash \phi$	A-A	B-B	C-C		壁	70			50			30			70			50			30			50		30		10	0
					床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
室指数					固 有 照 明 率 (×0.01)																								
0°	259	259	259	0.60	56	52	42	40	33	32	54	50	40	38	32	31	38	36	30	30	29	28	23	21					
10°	256	256	256	0.80	67	61	52	49	42	41	64	58	50	47	41	40	47	44	39	38	37	36	31	28					
20°	245	245	245	1.00	76	68	61	57	51	48	72	65	59	55	50	47	54	52	47	45	44	43	37	34					
30°	226	226	226	1.25	83	74	69	63	59	55	79	71	66	61	57	54	61	57	53	51	50	49	43	40					
40°	200	200	200	1.50	89	78	75	68	66	61	84	75	72	66	63	59	66	62	59	56	55	53	48	45					
50°	166	166	166	2.00	97	84	85	76	76	69	92	81	81	74	73	67	74	69	68	64	63	61	55	52					
60°	128	128	128	2.50	102	88	91	80	83	74	96	85	87	78	79	72	79	73	73	69	68	65	60	56					
70°	91	91	91	3.00	105	90	96	84	88	78	100	87	91	81	84	76	83	77	78	72	72	69	64	60					
80°	58	58	58	4.00	110	93	102	88	95	84	104	90	97	86	91	82	88	81	84	77	77	73	69	64					
90°	36	36	36	5.00	113	96	106	91	100	87	107	92	101	89	96	85	92	84	88	81	80	76	72	68					
100°	24	24	24	10.00	119	100	115	97	112	95	113	97	110	95	106	92	99	89	96	88	88	83	79	75					
110°	22	22	22																										
120°	23	23	23																										
130°	23	23	23																										
140°	24	24	24																										
150°	24	24	24																										
160°	22	22	22																										
170°	18	18	18																										
180°	0	0	0																										

