


東芝照明器具配光データシート

名称	LEDシーリング
形名	LEDH81102Y-LC

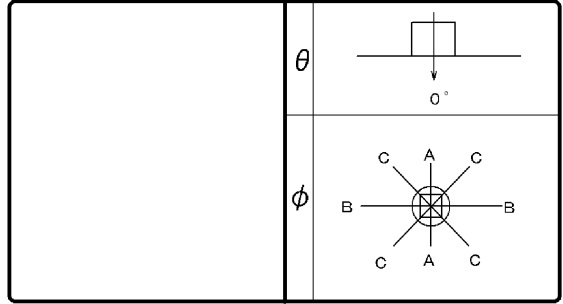

効 率	F	11 %
	F	89 %
	F	100 %
	器具光束	3670 lm

保守率	良	0.63
	中	0.60
	否	0.56

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	300	300	300
10°	295	295	295
20°	278	278	278
30°	254	254	254
40°	220	220	220
50°	180	180	180
60°	136	136	136
70°	88	88	88
80°	45	45	45
90°	15	15	15
100°	17	17	17
110°	17	17	17
120°	18	18	18
130°	19	19	19
140°	20	20	20
150°	20	20	20
160°	19	19	19
170°	17	17	17
180°	0	0	0

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	50	30	30	10	0						
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0					
室指数	固有照明率 (×0.01)																			
0.60	58	54	44	41	35	34	56	52	42	40	34	33	40	38	33	32	31	31	26	24
0.80	69	63	54	51	45	43	66	60	53	50	44	42	49	47	42	40	40	39	34	31
1.00	78	70	64	59	54	51	75	68	61	57	52	50	58	55	50	48	47	46	41	38
1.25	85	76	72	66	62	58	81	73	69	64	60	57	65	61	57	55	54	53	47	44
1.50	91	80	78	71	69	64	87	78	75	69	67	62	70	66	63	60	60	58	53	49
2.00	99	86	88	78	79	72	94	84	84	77	76	71	78	73	72	68	67	65	60	57
2.50	104	90	94	83	86	77	99	87	90	81	83	76	83	77	78	73	73	70	65	62
3.00	108	92	99	87	91	82	103	90	95	84	88	80	87	80	82	76	77	73	69	65
4.00	112	96	105	91	99	87	107	93	101	89	95	85	92	85	88	81	82	78	74	70
5.00	115	98	109	94	104	90	110	95	104	91	100	88	96	87	92	84	85	81	77	73
10.00	122	102	118	100	115	97	116	99	113	97	110	95	103	93	100	91	92	87	84	80

