


東芝照明器具配光データシート

名称	LEDシーリング
形名	LEDH82101Y-LC

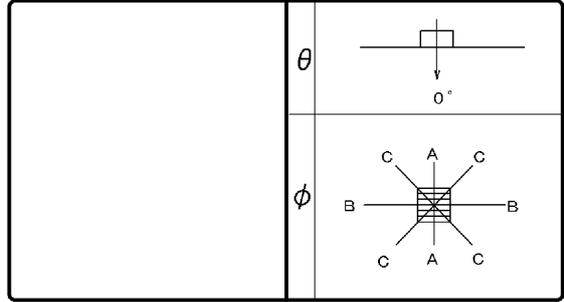

効 率	F	0 %
	F	100 %
	F	100 %
	器具光束	5530 lm

保守率	良	0.63
	中	0.60
	否	0.56

前面	
反射面	

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	349	349	349
10°	345	344	345
20°	332	331	332
30°	308	306	308
40°	269	266	269
50°	215	213	215
60°	152	150	152
70°	84	84	86
80°	30	30	29
90°	1	1	1
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	30	30	10	10	0						
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0					
室指数	固有照明率 (×0.01)																			
0.60	61	56	46	44	37	36	59	55	45	43	37	36	44	42	36	35	35	35	30	28
0.80	72	65	57	54	48	46	70	64	56	53	47	46	54	52	46	45	45	44	40	38
1.00	82	73	67	62	58	55	79	72	66	62	57	54	63	60	55	53	54	53	48	46
1.25	89	79	76	69	66	62	86	78	74	68	65	62	71	67	63	61	61	60	55	53
1.50	95	84	83	75	73	68	92	82	81	74	72	67	77	72	70	66	67	65	61	59
2.00	103	90	92	83	84	77	100	88	90	81	82	76	85	79	79	75	76	73	69	67
2.50	108	93	99	87	91	82	104	92	96	86	89	81	91	84	85	80	82	78	75	73
3.00	112	96	103	91	96	86	108	94	100	89	94	85	95	87	90	84	86	82	79	77
4.00	116	99	110	95	104	91	112	97	106	94	101	90	100	91	96	88	91	87	84	82
5.00	119	101	113	97	108	94	115	99	110	96	105	93	103	94	100	92	94	90	87	85
10.00	125	105	122	103	119	101	120	103	118	102	115	100	110	99	108	98	102	96	94	92

