


東芝ランプ 配光データシート

名称	LED電球 ミニクリ形
形名	LDA4N-G-E17 /S
光束	440 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

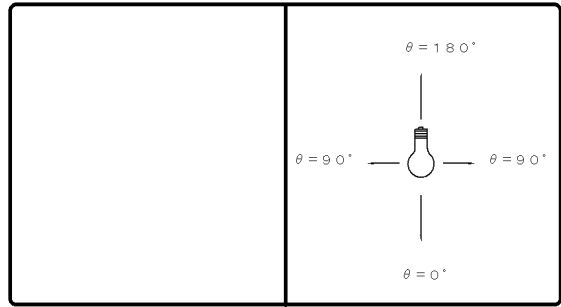

効率	F	%
	F	%
	F	100 %
	器具光束	440 lm

最大取付間隔	
A-A	1.5 H
B-B	1.5 H

備考
データは初期の標準値です。

光度 (cd/1000lm)			
θ	ϕ	A-A	B-B C-C
0°		136	
10°		135	
20°		134	
30°		133	
40°		130	
50°		126	
60°		120	
70°		111	
80°		101	
90°		88	
100°		74	
110°		60	
120°		46	
130°		32	
140°		1	
150°		0	
160°		0	
170°		0	
180°		0	

反射率 (%)	天井	80						70						50						30		20		0
	壁	70		50		30		70		50		30		50		30		30		10		0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0
室指数	照明率 (×0.01)																							
0.60	51	47	36	34	26	26	47	44	34	32	25	24	30	29	23	22	20	20	15	12				
0.80	60	55	45	42	35	33	56	51	42	40	33	32	37	36	30	29	27	26	20	17				
1.00	68	61	53	49	42	40	64	58	50	46	40	38	44	42	36	35	32	31	25	21				
1.25	75	67	60	55	49	46	70	63	57	52	47	44	50	47	42	40	38	36	30	26				
1.50	81	71	66	60	55	51	75	67	62	57	53	49	55	52	47	45	42	41	34	29				
2.00	89	77	76	68	65	60	83	73	71	64	62	57	62	58	55	52	49	47	41	35				
2.50	94	81	82	72	72	65	87	77	77	69	68	62	67	62	61	57	54	52	45	40				
3.00	98	84	87	76	78	69	91	80	81	72	73	66	71	66	65	61	57	55	49	43				
4.00	103	87	94	81	85	75	96	83	88	77	80	72	77	70	71	66	63	60	54	48				
5.00	106	90	98	84	91	79	99	85	92	80	85	76	80	73	75	69	66	63	57	51				
10.00	114	95	109	91	104	88	106	91	101	88	97	85	89	80	85	78	75	71	66	59				

