

# 東芝照明器具配光データシート


名称	ソーラーライト
形名	SLK-17039F-B

保守率	良	0.67
	中	0.63
	否	0.60



光源	名称	—
	形名	—
	光束	1000 lm × 1

効率	F ◡	5.0 %
	F ◣	95.0 %
	F ○	100 %
	器具光束	1000 lm

前面	グローブ (透明)
反射面	鏡面処理

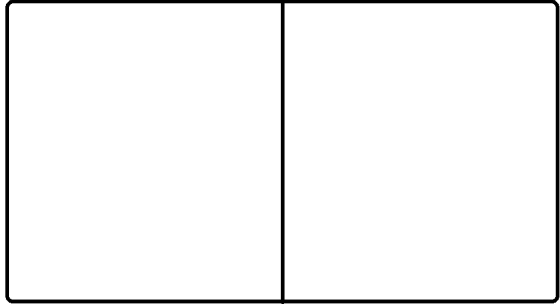

備考

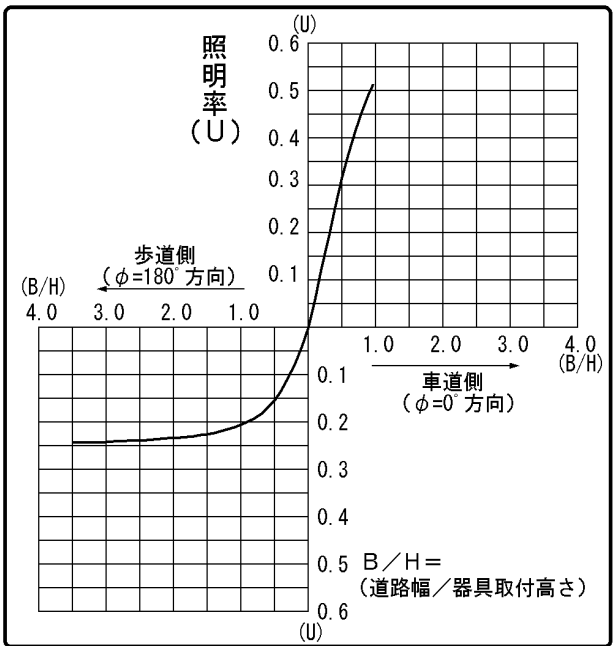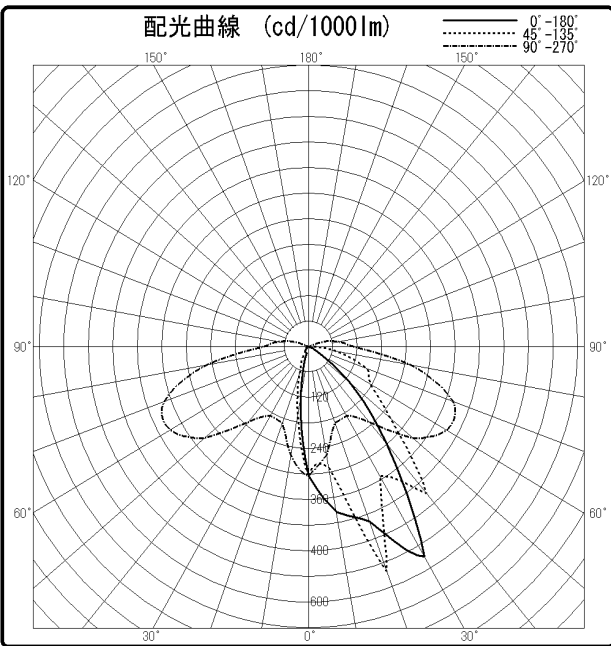

θ \ φ	0°	45°	90°	135°	180°
0°	303	303	303	303	303
10°	393	289	259	160	119
20°	437	561	191	62	16
30°	569	351	188	22	15
40°	297	449	233	16	15
50°	133	264	336	11	7
60°	24	174	393	10	9
70°	11	152	378	7	7
80°	0	69	260	7	5
90°	0	9	111	5	6
100°	0	0	70	7	4
110°	0	0	27	6	6
120°	0	0	0	7	0
130°	0	0	0	0	0
140°	0	0	0	0	0
150°	0	0	0	0	0
160°	0	0	0	0	0
170°	0	0	0	0	0
180°	0	0	0	0	0

