

東芝照明器具配光データシート


名 称	安全増防爆蛍光灯器具
形 名	SEFH4181-22 PP-PA9

光 源	名 称	蛍光灯
	形 名	FHF32EX-N-H
	光 束	4950 lm × 1

前 面	ポリカーボネートシリ ンダー, ガード (白)
反射面	塗装 (白)

保 守 率	良	0.78
	中	0.73
	否	0.69

効 率	F 	7 %
	F 	73 %
	F 	80 %
	器具 光束	3980 lm

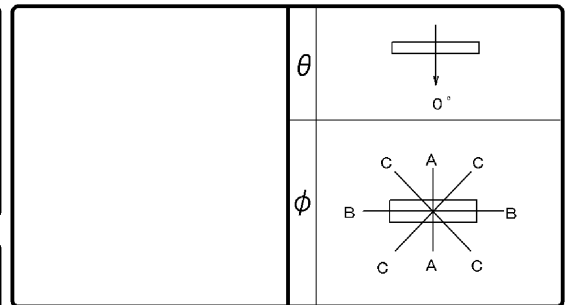

最大取付間隔	
A-A	1.5 H
B-B	1.3 H
備考	

光度 (cd/1000lm)				反射率 (%)	天井 壁 床	80						70						50						30		20	0			
$\theta \backslash \phi$	A-A	B-B	C-C			70			50			30			70			50			30			50		30		10	0	
						30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0
						照 明 率 (×0.01)																								
0°	175	175	175	0.60	45	42	33	32	26	25	43	40	32	31	25	25	30	29	24	24	23	23	19	17						
10°	179	172	176	0.80	54	49	42	39	34	33	52	48	41	38	33	32	38	36	32	31	30	30	26	23						
20°	195	163	178	1.00	60	54	48	44	40	38	57	52	46	43	39	37	43	41	37	35	35	34	30	27						
30°	195	149	179	1.25	66	59	54	50	46	43	63	57	52	48	45	42	49	46	42	41	40	39	35	32						
40°	168	129	163	1.50	70	62	59	53	51	47	67	60	57	52	49	46	53	49	46	44	44	42	38	36						
50°	156	103	136	2.00	77	67	67	60	59	54	73	65	64	58	57	53	59	55	54	51	50	48	44	42						
60°	151	76	117	2.50	81	70	72	63	64	58	77	68	69	62	62	57	63	59	58	54	54	52	48	45						
70°	114	46	103	3.00	84	72	76	66	69	61	80	70	72	65	66	60	67	61	62	57	58	55	51	48						
80°	108	20	72	4.00	88	75	81	70	75	66	84	73	77	68	72	64	71	65	67	62	62	59	56	53						
90°	102	6	64	5.00	90	76	84	72	79	69	86	74	81	71	76	67	74	67	70	64	65	62	58	55						
100°	30	5	13	10.00	96	80	92	78	89	75	91	78	88	76	85	74	80	73	78	71	72	68	65	62						
110°	12	5	8																											
120°	6	3	7																											
130°	6	4	4																											
140°	4	3	3																											
150°	4	3	3																											
160°	3	4	4																											
170°	3	3	4																											
180°	0	0	0																											

