


■ 東芝ランプ 配光データシート

名 称	LEDライトエンジン
形 名	LEC3/24N-W2 OGH50
光 束	2050 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

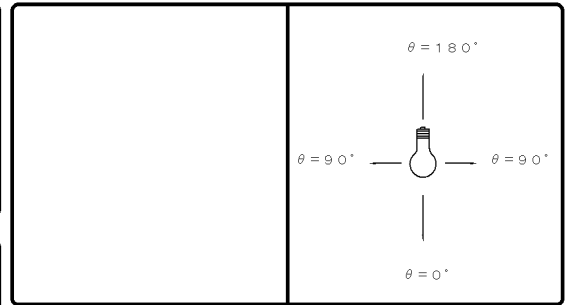

効 率	F	%
	F	%
	F	100 %
	器具 光束	2050 lm

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備 考	データは初期の標準値です。
--------	---------------

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	521		
10°	508		
20°	478		
30°	407		
40°	292		
50°	176		
60°	86		
70°	39		
80°	14		
90°	3		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反 射 率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		68	62	54	52	46	45	66	61	54	51	46	45	52	50	45	44	44	44	40	38		
0.80		79	72	66	62	57	55	77	70	65	61	57	55	63	60	56	54	55	53	49	48		
1.00		88	79	76	70	67	64	86	78	74	70	66	63	72	68	65	63	63	62	58	56		
1.25		95	85	84	77	75	71	93	83	82	76	74	70	79	74	72	69	70	68	64	63		
1.50		101	89	90	82	82	76	98	87	88	81	80	75	84	79	78	74	76	73	70	68		
2.00		108	94	99	88	91	83	105	93	96	87	89	83	92	85	86	81	83	80	77	75		
2.50		112	97	104	92	97	88	109	95	101	91	95	87	96	89	91	86	88	84	81	79		
3.00		115	99	108	95	102	91	112	98	105	94	100	90	100	92	95	89	91	87	84	82		
4.00		119	101	113	98	108	95	115	100	110	97	105	94	104	95	100	92	95	91	88	86		
5.00		122	103	117	100	112	98	117	101	113	99	109	97	106	97	103	95	98	93	91	89		
10.00		126	106	124	104	121	103	122	104	119	103	117	102	112	101	110	100	104	98	96	94		

