


■ 東芝ランプ 配光データシート

名 称	電球形LEDランプ ビームランプ形
形 名	LDR19L-D-W
光 束	730 lm × 1

保 守 率	良	1.00
	中	1.00
	否	1.00

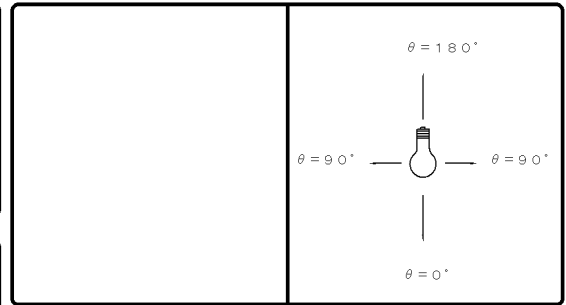

効 率	F	%
	F	%
	F	100 %
	器具 光束	730 lm

最大取付間隔	
A-A	0.5 H
B-B	0.5 H

備 考	データは初期の標準値です。
--------	---------------

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	2750		
10°	1975		
20°	710		
30°	256		
40°	117		
50°	38		
60°	9		
70°	5		
80°	2		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反 射 率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		86	80	77	73	72	69	85	79	76	73	71	69	75	72	70	69	70	68	66	65		
0.80		94	86	85	80	80	76	93	85	84	80	79	76	83	79	78	76	77	75	73	72		
1.00		101	90	92	85	86	82	98	89	91	85	85	81	88	84	84	81	82	80	78	77		
1.25		104	93	96	88	90	85	102	92	95	88	89	84	92	86	87	84	85	83	81	79		
1.50		107	95	100	90	94	87	105	94	98	90	92	87	94	88	90	86	88	85	83	81		
2.00		112	97	105	93	99	91	109	96	102	93	97	90	98	91	94	89	91	88	86	84		
2.50		114	99	108	96	103	93	111	98	106	95	101	92	101	93	97	91	94	90	88	86		
3.00		117	100	111	97	107	95	113	99	108	96	104	94	103	95	100	93	96	92	90	88		
4.00		120	102	115	100	112	98	116	101	112	99	109	97	106	97	104	96	99	94	93	91		
5.00		122	103	118	101	115	100	118	102	115	100	112	99	108	99	106	98	101	96	95	93		
10.00		126	105	125	105	123	105	122	104	120	104	119	104	113	102	112	102	106	100	99	97		

