


東芝照明器具配光データシート

名称	LEDダウンライト
形名	LEDD-60002FW-LD9

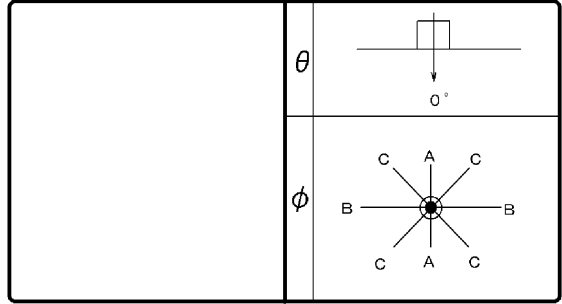

効 率	F	0 %
	F	100 %
	F	100 %
	器具光束	4340 lm

保守率	良	0.76
	中	0.72
	否	0.64

前面	カバー (フロスト)
反射面	アルミ蒸着処理

最大取付間隔	
A-A	1.0 H
B-B	1.0 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	595		
10°	568		
20°	501		
30°	414		
40°	286		
50°	164		
60°	80		
70°	32		
80°	12		
90°	1		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30						20						0								
	壁	70		50		30		70		50		30		50		30		30		10		0		30		10		0		10		0								
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10					
室指数	固有照明率 (×0.01)																																							
0.60	69	63	56	53	48	46	67	62	55	52	47	46	53	51	47	46	46	45	41	40	69	63	56	53	48	46	67	62	55	52	47	46	53	51	47	46	46	45	41	40
0.80	80	73	67	63	59	56	78	71	66	62	58	56	64	61	57	55	56	55	51	49	80	73	67	63	59	56	78	71	66	62	58	56	64	61	57	55	56	55	51	49
1.00	89	80	77	71	68	65	87	79	75	71	68	65	73	69	66	64	65	63	59	57	89	80	77	71	68	65	87	79	75	71	68	65	73	69	66	64	65	63	59	57
1.25	96	85	85	77	76	72	93	84	83	77	75	71	80	75	73	70	72	69	66	64	96	85	85	77	76	72	93	84	83	77	75	71	80	75	73	70	72	69	66	64
1.50	101	89	91	82	83	77	98	88	89	81	81	76	85	80	79	75	77	74	71	69	101	89	91	82	83	77	98	88	89	81	81	76	85	80	79	75	77	74	71	69
2.00	108	94	99	89	92	84	105	93	97	88	90	83	92	86	87	82	84	81	78	76	108	94	99	89	92	84	105	93	97	88	90	83	92	86	87	82	84	81	78	76
2.50	112	97	104	92	98	88	109	96	102	91	96	87	97	89	92	86	88	85	82	80	112	97	104	92	98	88	109	96	102	91	96	87	97	89	92	86	88	85	82	80
3.00	115	99	108	95	102	91	111	98	105	94	100	90	100	92	96	89	92	88	85	83	115	99	108	95	102	91	111	98	105	94	100	90	100	92	96	89	92	88	85	83
4.00	119	101	113	98	108	95	115	100	110	97	105	94	104	95	100	93	96	91	89	87	119	101	113	98	108	95	115	100	110	97	105	94	104	95	100	93	96	91	89	87
5.00	121	103	117	100	112	98	117	101	113	99	109	97	106	97	103	95	98	93	91	89	121	103	117	100	112	98	117	101	113	99	109	97	106	97	103	95	98	93	91	89
10.00	126	105	123	104	121	103	121	104	119	103	117	102	111	101	100	103	98	96	94	126	105	123	104	121	103	121	104	119	103	117	102	111	101	100	103	98	96	94		

