


■ 東芝ランプ 配光データシート

名 称	LEDユニットフラット
形 名	LDF9L-GX53
光 束	700 lm × 1

保 守 率	良	1.00
	中	1.00
	否	1.00

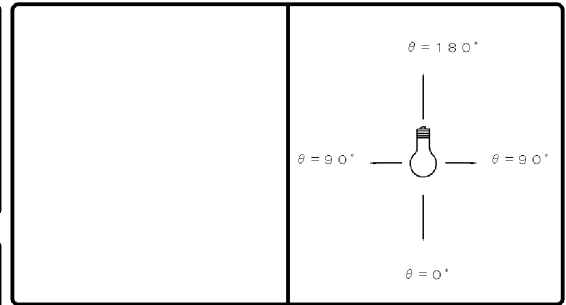

効 率	F	%
	F	%
	F	100 %
	器具 光束	700 lm

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備 考	データは初期の標準値です。
--------	---------------

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	361		
10°	353		
20°	330		
30°	292		
40°	243		
50°	189		
60°	136		
70°	86		
80°	42		
90°	15		
100°	12		
110°	11		
120°	10		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反 射 率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数	照 明 率 (×0.01)																						
0.60	60	56	46	44	37	36	58	54	45	43	37	36	43	41	36	35	35	34	29	27			
0.80	71	65	57	53	47	45	69	63	55	52	47	45	53	51	45	44	44	43	38	36			
1.00	81	72	66	62	57	54	78	71	65	60	56	53	62	58	54	52	52	51	46	43			
1.25	88	78	74	68	65	61	85	76	72	67	64	60	69	65	61	59	59	57	52	50			
1.50	94	83	81	74	72	67	90	81	79	72	70	66	74	70	67	64	65	63	58	55			
2.00	102	89	91	81	82	75	98	86	88	80	80	74	83	77	76	72	73	70	66	63			
2.50	107	92	97	86	89	80	102	90	94	84	86	79	88	81	82	77	78	75	71	68			
3.00	110	95	102	89	94	84	106	93	98	87	91	83	92	84	87	81	82	78	75	72			
4.00	115	98	108	93	101	89	110	96	104	92	98	88	97	89	92	85	87	83	80	77			
5.00	118	100	112	96	106	92	113	98	108	94	103	91	100	91	96	89	91	86	83	80			
10.00	124	103	120	101	117	99	119	102	116	100	113	98	107	97	105	95	98	92	90	87			

