

東芝照明器具配光データシート


名 称	LEDダウンライト
形 名	LEDD-15023L-LS9

効 率	F $\frac{1}{2}$	0 %
	F $\frac{1}{4}$	100 %
	F $\bigcirc$	100 %
器具光束		1190 lm

保守率	良	0.76
	中	0.72
	否	0.64

最大取付間隔	
A-A	0.7 H
B-B	0.7 H

前 面	カバー（フロスト）
反射面	白色

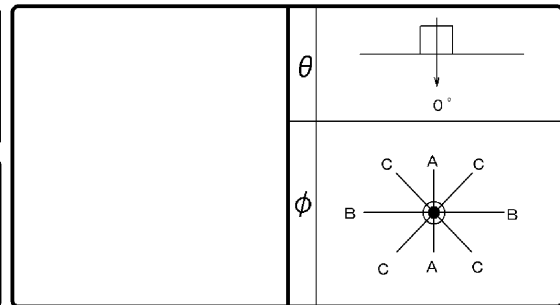

備 考	
-----	--

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	972		
10°	882		
20°	615		
30°	334		
40°	198		
50°	142		
60°	100		
70°	38		
80°	3		
90°	1		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反 射 率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		固 有 照 明 率 (×0.01)																					
0.60		78	72	67	64	60	58	77	71	66	63	60	58	65	62	59	58	58	57	54	53		
0.80		90	82	79	74	72	69	88	80	78	73	71	69	76	72	70	68	69	68	64	63		
1.00		95	85	84	78	77	73	93	84	83	78	76	73	80	76	75	72	73	71	68	67		
1.25		101	89	90	83	83	78	98	88	89	82	82	77	86	81	80	77	78	76	73	71		
1.50		104	92	95	86	88	82	102	91	93	85	87	81	89	84	84	80	82	79	76	75		
2.00		111	96	102	91	96	87	107	95	100	91	94	87	96	89	91	86	88	85	82	80		
2.50		114	99	107	94	101	91	111	97	104	93	99	90	99	92	95	89	91	88	85	83		
3.00		117	100	110	97	105	94	113	99	107	96	103	93	102	94	98	91	94	90	88	86		
4.00		121	102	115	100	111	97	116	101	112	99	108	96	106	97	103	95	98	93	91	89		
5.00		123	104	118	102	114	100	118	103	115	101	111	99	108	99	105	97	100	95	93	92		
10.00		127	106	125	105	123	104	123	105	121	104	119	103	113	102	112	101	105	100	98	96		

