


■ 東芝ランプ 配光データシート

名 称	電球形LEDランプビームランプ形
形 名	LDR12N-W
光 束	940 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

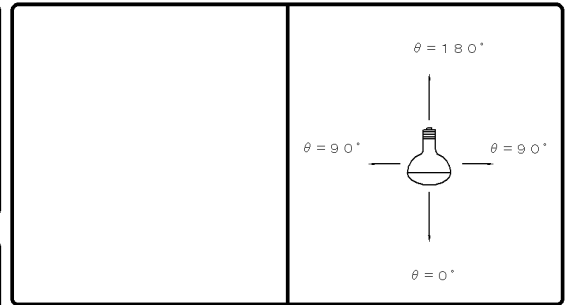

効 率	F	%
	F	%
	F	100 %
	器具 光束	940 lm

最大取付間隔	
A-A	0.5 H
B-B	0.5 H

備 考	データは初期の標準値です。
--------	---------------

光度 (cd/1000lm)			
0°	3245	25°	438
1°	3244	30°	292
2°	3219	35°	213
3°	3185	40°	136
4°	3120	45°	81
5°	3053	50°	42
6°	2938	55°	19
7°	2826	60°	8
8°	2659	65°	6
9°	2520	70°	5
10°	2329	75°	4
11°	2181	80°	3
12°	1986	85°	3
13°	1841	90°	3
14°	1658		
15°	1522		
16°	1352		
17°	1226		
18°	1071		
19°	958		
20°	823		

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		101	93	90	86	84	81	99	92	89	85	83	81	88	85	82	81	82	80	77	76		
0.80		110	100	100	94	93	89	108	99	99	93	92	89	96	92	91	88	90	88	85	84		
1.00		117	105	107	99	100	95	115	104	106	99	99	95	103	98	98	94	96	93	91	90		
1.25		122	108	112	103	105	99	119	107	110	102	104	98	107	101	102	97	100	97	94	93		
1.50		125	110	116	105	109	102	122	109	114	105	108	101	110	103	105	100	102	99	96	95		
2.00		130	113	122	109	116	105	126	112	119	108	114	105	114	106	110	104	106	102	100	98		
2.50		133	115	126	111	120	108	129	114	123	110	118	108	117	109	113	106	109	105	102	101		
3.00		136	117	130	113	124	111	132	115	126	112	121	110	120	110	116	108	112	107	104	103		
4.00		139	119	134	116	130	114	135	117	131	115	127	113	124	113	121	111	115	110	108	106		
5.00		142	120	138	118	134	117	137	119	134	117	130	116	126	115	124	114	118	112	110	108		
10.00		147	123	145	122	143	122	142	121	140	121	139	121	131	119	131	119	123	116	115	113		

