


東芝照明器具配光データシート

名称	LED高天井器具
形名	LEDJ-20022N-DJ2

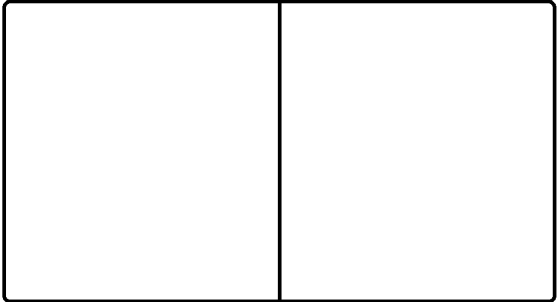

効 率	F	0 %
	F	100 %
	F	100 %
	器具光束	21600 lm

保守率	良	0.81
	中	0.81
	否	0.77

前面	カバー (透明)
反射面	レンズ (広角)

最大取付間隔	
A-A	1.4 H
B-B	1.4 H

備考
この器具は初期照度補正機能付器具です。光束・照度は記載値の約0.81倍になります。

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	407	407	407
10°	428	428	425
20°	427	427	425
30°	401	401	402
40°	322	322	326
50°	198	198	204
60°	91	91	93
70°	40	40	42
80°	3	3	3
90°	0	0	0
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80						70						50						30		20		0
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0							
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0							
室指数	固有照明率 (×0.01)																							
0.60	66	61	52	50	44	42	64	59	51	49	44	42	50	48	43	42	42	41	37	35				
0.80	77	70	64	60	55	53	75	69	63	59	55	53	61	58	54	52	53	52	47	46				
1.00	87	78	74	69	66	62	85	77	73	68	65	62	70	67	63	61	62	60	56	54				
1.25	94	84	83	76	74	69	92	82	81	75	73	69	78	73	71	68	69	67	63	61				
1.50	100	88	89	81	81	75	97	87	87	80	80	75	83	78	77	74	75	73	69	67				
2.00	108	94	98	88	91	83	104	92	96	87	89	82	91	85	86	81	83	80	76	75				
2.50	112	97	104	92	97	87	108	95	101	91	95	87	96	89	91	85	88	84	81	79				
3.00	115	99	108	94	102	91	111	97	105	93	99	90	99	91	95	89	91	87	84	82				
4.00	119	101	113	98	108	95	115	100	110	97	105	94	104	95	100	92	95	91	88	86				
5.00	121	103	116	100	112	97	117	101	113	99	109	96	106	97	103	95	98	93	91	89				
10.00	126	105	123	104	121	102	121	104	119	103	117	101	111	101	110	99	103	98	96	94				

