


# 東芝ランプ 配光データシート

名称	東芝LED電球
形名	LDA6L-H
光束	380 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

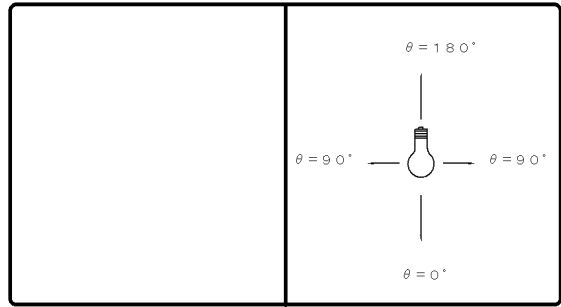

効率	F	%
	F	%
	F	100 %
	器具光束	380 lm

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考  
データは初期の標準値です。

光度 (cd/1000lm)			
$\theta$	$\phi$	A-A	B-B C-C
0°		257	
10°		255	
20°		246	
30°		229	
40°		206	
50°		176	
60°		141	
70°		104	
80°		71	
90°		46	
100°		28	
110°		17	
120°		11	
130°		6	
140°		3	
150°		2	
160°		1	
170°		0	
180°		0	

反射率 (%)	天井	80						70						50						30		20		0						
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0													
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0
室指数		照明率 (×0.01)																												
0.60		56	52	41	39	32	31	54	50	40	38	31	30	38	36	30	29	29	28	23	21									
0.80		67	60	51	48	42	40	64	58	50	47	41	39	47	45	39	38	37	36	31	28									
1.00		76	68	60	56	50	48	72	66	59	55	49	47	55	52	47	45	44	43	38	35									
1.25		83	74	68	63	58	55	79	71	66	61	57	53	62	58	54	51	51	49	44	41									
1.50		89	78	75	68	65	60	85	76	72	66	63	59	67	63	60	57	56	55	49	46									
2.00		97	84	85	76	75	69	92	82	81	74	73	67	75	70	68	65	64	62	57	54									
2.50		102	88	91	80	82	74	97	85	87	78	79	73	81	75	74	70	70	67	62	59									
3.00		106	91	96	84	88	78	101	88	92	82	85	77	85	78	79	74	74	71	66	62									
4.00		111	94	102	89	95	84	105	91	98	87	92	82	90	82	85	79	79	76	71	68									
5.00		114	96	107	92	100	87	108	94	102	89	96	86	94	85	89	82	83	79	75	71									
10.00		120	101	116	98	112	95	115	98	111	96	108	93	101	92	99	90	91	86	83	79									

