


東芝ランプ 配光データシート

名称	東芝LED電球
形名	LDA7L-G-K/4OW
光束	485 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

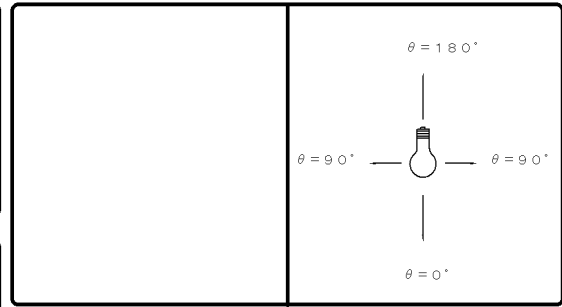

効率	F	%
	F	%
	F	100 %
	器具光束	485 lm

最大取付間隔	
A-A	1.4 H
B-B	1.4 H

備考

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	155		
10°	154		
20°	152		
30°	147		
40°	140		
50°	132		
60°	122		
70°	110		
80°	96		
90°	82		
100°	67		
110°	53		
120°	39		
130°	26		
140°	16		
150°	8		
160°	2		
170°	0		
180°	0		

反射率 (%)	天井		80				70				50				30		20	0		
	壁	床	70	50	30	70	50	30	50	30	50	30	50	30	30	10	0			
室指数		照明率 (×0.01)																		
0.60	52	48	37	35	28	27	49	45	35	33	26	26	31	30	24	23	22	21	16	13
0.80	62	56	46	43	36	34	58	53	44	41	34	33	39	37	31	30	28	28	22	19
1.00	70	63	54	50	44	41	65	59	51	48	42	40	46	44	38	36	34	33	27	23
1.25	77	68	62	57	51	48	72	65	58	54	49	46	52	49	44	42	40	38	32	28
1.50	83	73	68	62	57	53	77	69	64	59	55	51	57	53	49	47	44	43	37	32
2.00	91	79	77	69	67	61	84	75	73	66	64	59	65	60	57	54	51	49	43	38
2.50	96	83	84	74	74	67	89	78	79	71	70	64	70	64	63	59	56	54	48	42
3.00	100	85	89	78	80	71	93	81	83	74	75	68	74	68	67	63	60	57	51	46
4.00	105	89	96	83	88	77	98	85	90	79	83	74	79	72	73	68	65	62	56	50
5.00	108	91	100	86	93	81	101	87	94	82	88	78	83	75	78	71	69	65	60	54
10.00	115	96	110	93	106	90	108	92	103	89	99	86	91	82	88	80	77	73	68	62

