


■ 東芝ランプ 配光データシート

名 称	LEDユニットフラット
形 名	LDF6L-H-GX5 3/C7
光 束	510 lm × 1

保 守 率	良	1.00
	中	1.00
	否	1.00

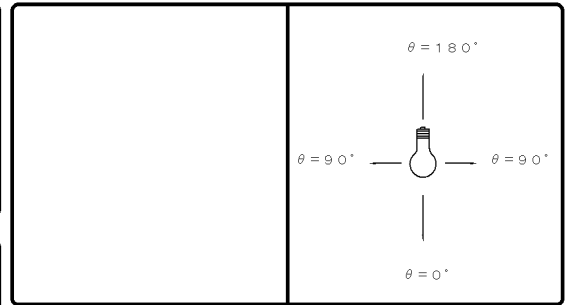

効 率	F	%
	F	%
	F	100 %
	器具 光束	510 lm

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備 考	データは初期の標準値です。
--------	---------------

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	355		
10°	348		
20°	325		
30°	287		
40°	238		
50°	185		
60°	133		
70°	84		
80°	41		
90°	16		
100°	13		
110°	12		
120°	10		
130°	9		
140°	7		
150°	4		
160°	2		
170°	0		
180°	0		

反 射 率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数	照 明 率 (×0.01)																						
0.60	60	55	46	43	37	36	58	54	45	43	36	35	43	41	35	35	34	34	29	27			
0.80	71	65	57	53	47	45	68	63	55	52	46	45	53	50	45	44	43	42	38	35			
1.00	80	72	66	61	56	54	77	70	64	60	55	53	61	58	53	51	51	50	45	43			
1.25	88	78	74	68	65	61	84	76	72	67	63	60	68	64	61	58	58	57	52	49			
1.50	93	82	81	73	71	66	90	80	78	72	70	65	74	69	67	63	64	62	57	54			
2.00	101	88	90	81	82	74	97	86	87	79	79	73	82	76	75	71	72	69	65	62			
2.50	106	92	96	85	88	80	102	90	93	84	86	79	87	80	81	76	77	74	70	67			
3.00	110	94	101	89	94	84	105	92	97	87	91	82	91	84	86	80	81	77	74	71			
4.00	114	97	107	93	101	89	109	95	103	91	98	87	96	88	92	85	86	82	78	76			
5.00	117	99	111	95	106	92	112	97	107	94	102	91	99	90	95	88	89	85	82	79			
10.00	123	103	120	101	117	99	118	101	115	99	112	97	106	96	104	94	97	91	89	86			

