


■ 東芝ランプ 配光データシート

名 称	LEDユニットフラット
形 名	LDF6N-W-GX5 3/C7
光 束	560 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

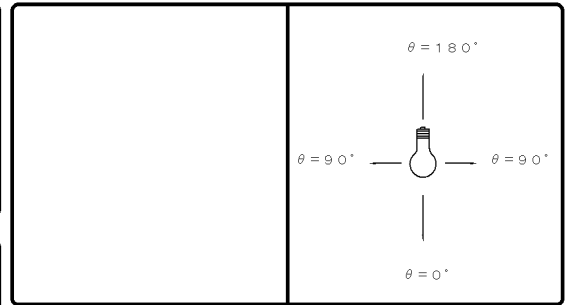

効 率	F	%
	F	%
	F	100 %
	器具 光束	560 lm

最大取付間隔	
A-A	0.7 H
B-B	0.7 H

備 考	データは初期の標準値です。
--------	---------------

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	1214		
10°	1012		
20°	636		
30°	353		
40°	182		
50°	87		
60°	55		
70°	38		
80°	24		
90°	9		
100°	6		
110°	4		
120°	2		
130°	2		
140°	2		
150°	2		
160°	1		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		75	69	63	60	56	54	73	68	62	59	56	54	61	58	55	53	54	53	49	48		
0.80		85	77	73	68	65	63	82	76	72	68	65	62	70	66	64	62	62	61	57	56		
1.00		92	83	81	75	74	70	90	82	80	74	73	69	77	73	71	68	69	67	64	62		
1.25		98	87	87	80	80	75	95	86	86	79	79	74	82	77	76	73	74	72	69	67		
1.50		102	90	92	84	85	79	99	89	90	83	83	78	86	81	81	77	78	76	72	71		
2.00		108	94	100	89	93	85	105	93	97	88	91	84	92	86	87	82	84	81	78	76		
2.50		112	97	104	92	98	88	108	95	101	91	96	87	96	89	91	86	88	84	81	79		
3.00		115	98	108	95	102	91	111	97	105	93	99	90	99	91	95	88	90	87	84	82		
4.00		119	101	113	98	108	95	114	99	109	96	105	94	103	94	99	92	94	90	87	85		
5.00		121	102	116	100	112	97	116	101	112	98	108	96	105	96	102	94	97	92	90	88		
10.00		126	105	123	104	121	103	121	104	119	103	117	101	111	100	109	99	102	97	95	93		

