


# 東芝照明器具配光データシート

名称	LEDシーリングライト
形名	LEDH81702Y-LC

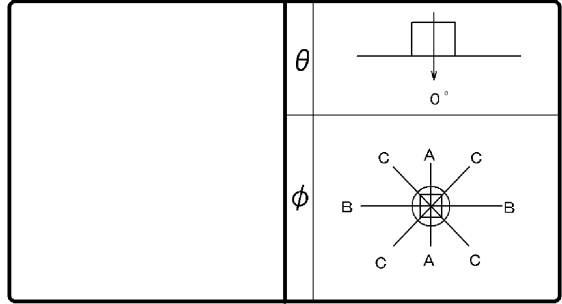

効 率	F	13%
	F	87%
	F	100%
	器具光束	3850 lm

保守率	良	0.67
	中	0.63
	否	0.56

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

器具寸法 : 0, 1310484, 4529583 (mm)

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
$0^\circ$	281	281	281
$10^\circ$	276	276	276
$20^\circ$	264	264	264
$30^\circ$	242	242	242
$40^\circ$	212	212	212
$50^\circ$	176	176	176
$60^\circ$	134	134	134
$70^\circ$	90	90	90
$80^\circ$	49	49	49
$90^\circ$	23	23	23
$100^\circ$	18	18	18
$110^\circ$	18	18	18
$120^\circ$	19	19	19
$130^\circ$	21	21	21
$140^\circ$	22	22	22
$150^\circ$	23	23	23
$160^\circ$	22	22	22
$170^\circ$	19	19	19
$180^\circ$	0	0	0

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	30	30	10	0							
	床	30	10	30	10	30	10	30	10	30	10	30	10	0						
室指数	固有照明率 (×0.01)																			
0.60	57	53	43	41	34	33	55	51	41	39	33	32	39	37	32	31	30	30	25	22
0.80	68	62	53	50	44	42	65	59	51	48	43	41	48	46	41	39	38	38	33	30
1.00	77	69	62	58	53	50	73	67	60	56	51	49	56	53	48	47	46	45	40	37
1.25	84	75	70	65	61	57	80	72	68	63	59	56	63	59	56	53	52	51	46	43
1.50	90	79	77	70	67	62	86	77	74	68	65	61	69	64	61	58	58	56	51	47
2.00	98	85	87	77	78	71	93	82	83	75	75	69	77	71	70	66	66	63	58	55
2.50	103	89	93	82	85	76	98	86	89	80	82	74	82	76	76	71	71	68	63	60
3.00	107	91	98	85	90	80	101	89	93	83	87	78	86	79	80	75	75	71	67	63
4.00	111	95	104	90	97	86	106	92	99	88	93	84	91	83	86	80	80	76	72	68
5.00	114	97	108	93	102	89	109	94	103	90	98	87	94	86	90	83	83	79	75	71
10.00	121	101	117	99	113	96	114	98	111	96	108	94	101	91	99	90	91	86	82	78

