

東芝照明器具配光データシート


名 称	LEDシーリングライト
形 名	LEDH82706Y-LC

効 率	F 	14 %
	F 	86 %
	F 	100 %
器具光束		4710 lm

保守率	良	0.63
	中	0.60
	否	0.56

最大取付間隔	
A-A	1.27 H
B-B	1.27 H

前 面	カバー（乳白）
反射面	塗装（白）

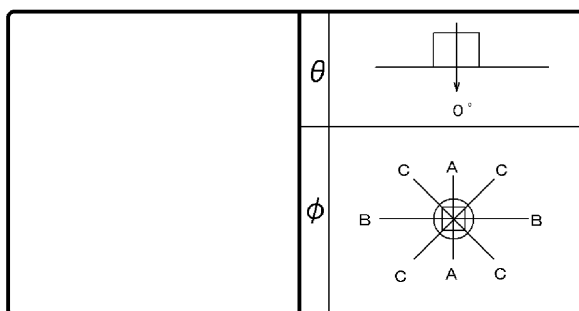

備考	
----	--

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	281	282	282
10°	277	277	277
20°	264	264	264
30°	241	241	241
40°	212	212	212
50°	175	175	175
60°	132	132	132
70°	87	87	87
80°	45	45	45
90°	21	21	21
100°	18	18	18
110°	20	20	20
120°	22	22	22
130°	24	24	24
140°	26	26	26
150°	27	27	27
160°	26	26	26
170°	23	23	23
180°	0	0	0

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		固有照明率 (×0.01)																					
0.60		60	55	45	43	37	36	57	53	44	42	36	35	41	40	34	34	33	32	28	25		
0.80		71	65	57	53	48	46	68	62	55	52	47	45	52	49	44	43	42	41	36	34		
1.00		78	70	64	60	55	52	75	68	62	58	53	51	58	55	51	49	48	47	42	39		
1.25		86	76	72	66	63	59	82	74	70	65	61	58	65	61	58	55	54	53	48	44		
1.50		91	80	78	71	69	64	86	77	75	69	67	62	70	65	63	60	59	57	52	49		
2.00		99	86	88	79	79	72	94	83	84	76	76	71	78	72	71	67	67	64	59	56		
2.50		104	89	94	83	86	77	98	87	90	81	83	75	82	76	77	72	71	69	64	60		
3.00		107	92	98	86	91	81	102	89	94	84	88	79	86	79	81	75	75	72	68	64		
4.00		112	95	105	91	98	86	106	92	100	88	94	84	91	83	87	80	80	76	72	68		
5.00		115	97	109	93	103	90	109	94	103	91	99	87	94	86	91	83	83	79	75	71		
10.00		121	101	117	99	114	97	114	98	111	96	109	94	101	91	99	90	90	85	82	78		

