


# 東芝照明器具配光データシート

名称	LEDシーリングライト
形名	LEDH84704Y-LC

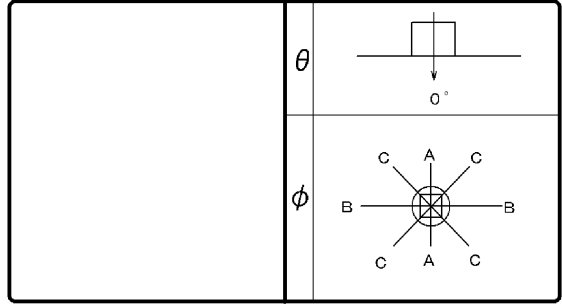

効 率	F $\frac{1}{2}$	13%
	F $\frac{3}{4}$	87%
	F $\bigcirc$	100%
	器具 光束	4500 lm

保守 率	良	0.67
	中	0.63
	否	0.56

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	280	280	280
10°	276	276	276
20°	264	264	264
30°	242	242	242
40°	213	213	213
50°	176	176	176
60°	135	135	135
70°	90	90	90
80°	49	49	49
90°	23	23	23
100°	17	17	17
110°	18	18	18
120°	19	19	19
130°	22	22	22
140°	22	22	22
150°	23	23	23
160°	22	22	22
170°	19	19	19
180°	0	0	0

反射率 (%)	天井	80			70			50			30		20	0							
	壁	70	50	30	70	50	30	50	30	30	30	10	0								
	床	30	10	30	10	30	10	30	10	30	10	30	10	0							
室指数		固有照明率 (×0.01)																			
	0.60	57	53	43	41	34	33	55	51	41	40	33	32	39	37	32	31	30	30	25	22
	0.80	68	62	53	50	44	42	65	59	51	49	43	41	48	46	41	39	39	38	33	30
	1.00	77	69	63	58	53	50	73	67	60	56	51	49	56	53	49	47	46	45	40	37
	1.25	84	75	71	65	61	57	80	72	68	63	59	56	63	59	56	53	53	51	46	43
	1.50	90	79	77	70	67	63	86	77	74	68	65	61	69	64	61	59	58	56	51	48
	2.00	98	85	87	77	78	71	93	83	83	75	75	69	77	71	70	66	66	63	58	55
	2.50	103	89	93	82	85	76	98	86	89	80	82	75	82	76	76	71	71	68	63	60
	3.00	107	92	98	86	90	80	102	89	94	83	87	79	86	79	80	75	75	72	67	63
	4.00	112	95	104	90	97	86	106	92	99	88	94	84	91	83	86	80	80	76	72	68
	5.00	114	97	108	93	102	89	109	94	103	90	98	87	94	86	90	83	83	79	75	71
	10.00	121	101	117	99	114	97	115	98	111	96	108	94	101	92	99	90	91	86	82	78

