


東芝照明器具配光データシート

名称	LEDシーリングライト
形名	LEDH86702Y-LC

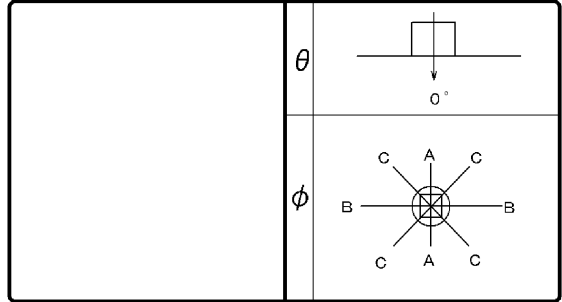

効 率	F $\frac{1}{2}$	13 %
	F $\frac{3}{4}$	87 %
	F \bigcirc	100 %
	器具 光束	5600 lm

保守 率	良	0.67
	中	0.63
	否	0.56

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

器具寸法 : 0, 1310484, 4529583 (mm)

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	280	280	280
10°	276	276	276
20°	264	264	264
30°	242	242	242
40°	213	213	213
50°	177	177	177
60°	135	135	135
70°	90	90	90
80°	49	49	49
90°	23	23	23
100°	17	17	17
110°	18	18	18
120°	19	19	19
130°	21	21	21
140°	22	22	22
150°	23	23	23
160°	22	22	22
170°	19	19	19
180°	0	0	0

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	50	30	30	10	0						
	床	30	10	30	10	30	10	30	10	30	10	30	10	0						
室指数	固有照明率 (×0.01)																			
0.60	57	52	42	40	34	33	54	50	41	39	33	32	39	37	31	31	30	29	25	22
0.80	67	61	53	49	43	42	64	59	51	48	42	41	48	46	40	39	38	37	32	30
1.00	76	69	62	57	52	49	73	66	60	56	51	48	56	53	48	46	46	44	39	36
1.25	84	74	70	64	60	56	80	72	67	62	58	55	63	59	55	53	52	51	45	42
1.50	89	79	76	69	67	62	85	76	74	67	65	61	68	64	61	58	57	55	50	47
2.00	97	85	86	77	77	70	93	82	83	75	74	69	76	71	70	66	65	63	58	54
2.50	102	88	92	81	84	76	97	85	88	79	81	74	81	75	75	71	70	67	63	59
3.00	106	91	97	85	89	80	101	88	93	83	86	78	85	78	80	74	74	71	66	63
4.00	111	94	103	89	97	85	105	91	99	87	93	83	90	82	86	79	79	76	71	68
5.00	114	96	107	92	102	88	108	93	102	90	97	86	93	85	90	82	83	78	75	71
10.00	120	100	116	98	113	96	114	97	111	95	108	94	100	91	98	89	90	85	82	78

