


東芝照明器具配光データシート

名称	東芝LED器具
形名	LEDT-42401NK-LS9

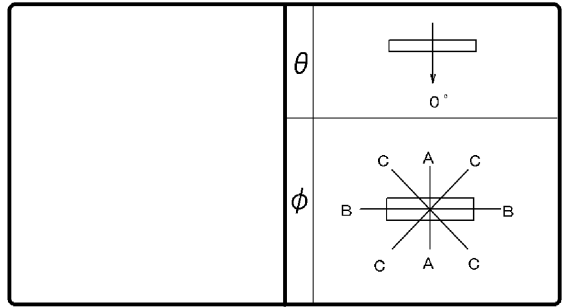

効 率	F	4 %
	F	96 %
	F	100 %
	器具 光束	4130 lm

保守 率	良	0.83
	中	0.81
	否	0.77

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	319	319	319
10°	303	316	316
20°	288	297	298
30°	262	267	270
40°	230	228	233
50°	193	183	191
60°	152	133	146
70°	109	80	98
80°	72	29	57
90°	49	3	34
100°	33	2	17
110°	9	2	1
120°	1	2	1
130°	1	1	1
140°	1	1	1
150°	1	1	1
160°	1	2	1
170°	1	2	1
180°	1	1	1

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	30	30	10	0							
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0					
室指数	固有照明率 (×0.01)																			
0.60	61	56	46	44	38	37	59	54	45	43	37	36	44	42	36	35	35	35	30	28
0.80	73	66	58	55	49	47	70	64	57	54	48	46	54	52	47	45	45	44	40	37
1.00	80	72	66	61	56	53	77	70	64	60	55	52	61	58	53	51	51	50	45	43
1.25	87	78	74	68	64	60	84	76	72	66	63	59	68	64	60	58	58	56	52	49
1.50	92	81	80	72	70	65	89	79	77	71	69	64	73	68	66	63	63	61	56	54
2.00	101	88	89	80	80	73	97	85	87	78	78	72	81	76	75	71	71	69	64	62
2.50	105	91	95	84	87	78	101	89	92	83	85	77	86	80	80	75	76	73	69	66
3.00	109	93	100	87	92	82	104	91	96	86	90	81	90	83	85	79	80	77	73	70
4.00	114	97	106	92	100	88	109	95	102	90	97	86	95	87	91	84	86	82	78	75
5.00	116	98	110	94	104	91	112	97	106	93	101	90	99	90	95	87	89	84	81	78
10.00	123	103	119	100	116	98	117	101	114	99	111	97	106	96	103	94	96	91	89	86

