

# 東芝照明器具配光データシート


名称	LEDスポットライト
形名	LEDS-02801L N-LS9

光源	名称	LED
	形名	—
	光束	1580 lm × 1

前面	ガラス (クリアー)
反射面	レンズ

保守率	良	0.83
	中	0.81
	否	0.77

効率	F	0%
	F	100%
	F	100%
	器具光束	1580 lm

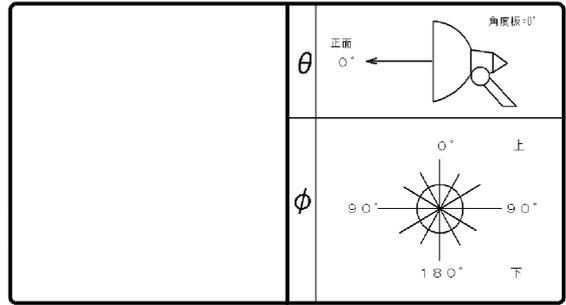

最大取付間隔	
A-A	0.3 H
B-B	0.3 H

備考	
----	--

光度 (cd/1000lm)			
0°	5604	25°	289
1°		30°	169
2°		35°	117
3°		40°	81
4°		45°	58
5°	4369	50°	45
6°		55°	35
7°		60°	27
8°		65°	20
9°		70°	14
10°	2207	75°	8
11°		80°	3
12°		85°	1
13°		90°	0
14°			
15°	1106		
16°			
17°			
18°			
19°			
20°	575		

反射率 (%)	天井	80						70						50						30		20		0
	壁	70	50	30	70	50	30	50	30	30	50	30	30	50	30	30	10	0						
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0					
室指数	照明率 (×0.01)																							
0.60	101	93	94	89	90	87	100	93	93	89	89	87	92	89	89	87	88	86	85	84				
0.80	109	99	103	97	99	95	108	99	102	96	98	94	100	96	97	94	96	94	93	92				
1.00	110	99	104	96	99	94	109	99	102	96	98	94	100	95	97	93	95	93	91	90				
1.25	112	99	105	96	100	94	110	99	103	96	99	93	100	95	97	93	95	92	90	89				
1.50	114	100	107	97	102	95	111	99	105	97	101	94	102	96	98	94	96	93	91	90				
2.00	117	102	111	99	106	96	114	101	108	98	104	96	104	97	100	95	97	94	92	91				
2.50	119	103	113	100	109	98	116	102	111	99	107	98	106	98	103	96	99	95	93	92				
3.00	121	104	116	101	112	100	117	103	113	101	109	99	108	99	105	98	101	96	95	93				
4.00	124	105	120	104	116	102	120	104	117	103	114	102	110	101	108	100	103	99	97	96				
5.00	126	106	123	105	120	104	122	105	119	104	117	103	112	102	111	102	105	100	99	97				
10.00	130	109	129	109	128	109	125	107	125	108	124	108	117	106	116	106	101	04	03	01				

