

東芝照明器具配光データシート


名 称	LEDスポットライト
形 名	LEDS-01801N W-LS9

光源	名称	LED
	形名	—
	光束	1170 lm × 1

前 面	ガラス（クリアー）
反射面	レンズ

保守率	良	0.83
	中	0.81
	否	0.77

効 率	F 	0 %
	F 	100 %
	F 	100 %
	器具 光束	1170 lm

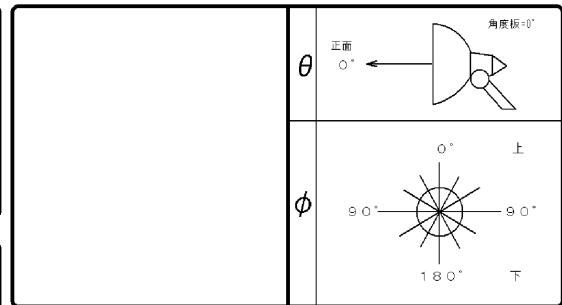

最大取付間隔	
A-A	0.9 H
B-B	0.9 H
備考	

光度 (cd/1000lm)			
0°	989	25°	671
1°		30°	471
2°		35°	284
3°		40°	164
4°		45°	99
5°	990	50°	65
6°		55°	45
7°		60°	32
8°		65°	23
9°		70°	15
10°	985	75°	8
11°		80°	3
12°		85°	1
13°		90°	0
14°			
15°	940		
16°			
17°			
18°			
19°			
20°	833		

反射率 (%)	天井	80						70						50						30			20	0
	壁	70		50		30		70		50		30		50		30		30			10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0			
室指数		照 明 率 (×0.01)																						
0.60		87	80	77	74	72	69	86	79	77	73	71	69	75	73	71	69	70	69	66	65			
0.80		98	89	89	84	84	80	97	88	88	83	83	80	87	83	82	79	81	79	77	76			
1.00		102	92	93	87	87	83	100	91	92	86	87	83	90	85	85	82	84	81	79	78			
1.25		107	95	98	90	92	86	104	94	97	89	91	86	94	88	89	85	87	84	82	81			
1.50		110	97	102	92	96	89	107	96	100	92	95	89	96	90	92	88	90	87	85	83			
2.00		115	100	108	96	102	93	111	99	105	95	100	93	101	94	97	92	94	90	88	87			
2.50		117	101	111	98	106	96	114	100	108	97	104	95	104	96	100	94	96	92	90	89			
3.00		119	102	114	100	109	98	116	101	111	99	107	97	106	97	102	95	98	94	92	91			
4.00		122	104	118	102	114	100	118	103	115	101	111	99	108	99	106	98	101	96	95	93			
5.00		124	105	120	103	117	102	120	104	117	102	114	101	110	100	108	99	103	98	96	94			
10.00		128	107	126	106	124	106	123	106	122	105	120	105	114	103	113	103	107	101	100	98			

