


東芝照明器具配光データシート

名称	LEDスポットライト
形名	LEDS-01801L M-LS9

保守率	良	0.83
	中	0.81
	否	0.77

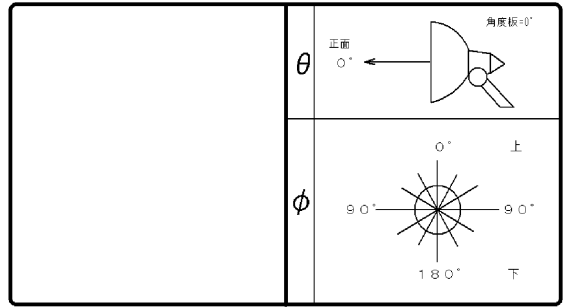

光源	名称	LED
	形名	—
	光束	870 lm × 1

効率	F	0%
	F	100%
	F	100%
	器具光束	870 lm

最大取付間隔	
A-A	0.5 H
B-B	0.5 H

備考	
----	--

前面	ガラス (クリアー)
反射面	レンズ

0°	3025	25°	286
1°		30°	152
2°		35°	101
3°		40°	72
4°		45°	56
5°	2935	50°	42
6°		55°	31
7°		60°	23
8°		65°	17
9°		70°	11
10°	2381	75°	7
11°		80°	3
12°		85°	1
13°		90°	0
14°			
15°	1514		
16°			
17°			
18°			
19°			
20°	718		

反射率 (%)	天井	80						70						50						30		20		0
	壁	70	50	30	70	50	30	50	30	50	30	50	30	30	10	0								
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0					
室指数	照明率 (×0.01)																							
0.60	101	93	94	90	90	87	100	93	94	89	90	87	92	89	89	87	88	86	85	84				
0.80	110	100	103	97	99	95	108	99	102	97	99	95	101	96	97	94	96	94	93	92				
1.00	111	100	104	97	99	94	109	99	103	96	99	94	101	95	97	94	96	93	92	91				
1.25	112	100	105	97	100	94	110	99	104	96	99	94	101	95	97	93	95	92	91	90				
1.50	114	101	108	98	103	95	112	100	106	97	101	95	102	96	99	94	96	93	92	91				
2.00	117	102	111	99	106	97	114	101	109	98	104	96	104	97	101	95	98	94	93	91				
2.50	119	103	114	101	109	98	116	102	111	100	107	98	106	98	103	97	99	95	94	92				
3.00	121	104	116	102	112	100	117	103	113	101	110	99	108	99	105	98	101	97	95	94				
4.00	124	105	120	104	117	103	120	104	117	103	114	102	111	101	108	100	104	99	97	96				
5.00	126	106	123	105	120	104	122	105	119	104	117	103	113	103	111	102	106	100	99	97				
10.00	130	108	129	108	128	109	125	107	124	108	124	108	117	106	116	106	101	04	03	01				

