


東芝照明器具配光データシート

名称	東芝LED器具
形名	LEDT-43201WK-LS9

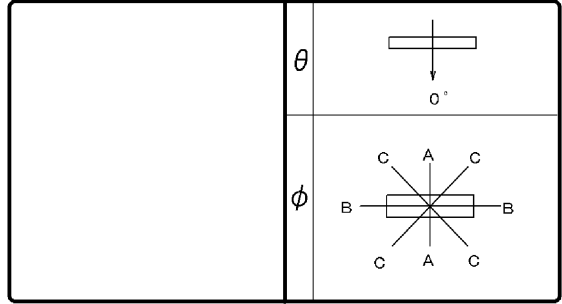

効 率	F	8 %
	F	92 %
	F	100 %
	器具 光束	2040 lm

保守 率	良	0.83
	中	0.81
	否	0.77

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	307	307	307
10°	294	304	303
20°	277	284	286
30°	254	256	259
40°	224	219	225
50°	187	176	185
60°	146	128	141
70°	104	76	94
80°	67	27	54
90°	42	3	27
100°	29	3	20
110°	25	2	18
120°	23	2	16
130°	21	2	12
140°	17	2	9
150°	10	1	4
160°	1	2	1
170°	1	2	1
180°	1	1	1

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	30	30	10	10	0						
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0					
室指数	固有照明率 (×0.01)																			
0.60	60	56	46	44	37	36	58	54	45	43	37	36	43	41	36	35	34	34	29	27
0.80	72	65	58	54	49	47	69	64	56	53	48	46	53	51	46	44	44	43	38	36
1.00	79	71	65	60	56	53	76	69	63	59	54	52	60	57	52	50	50	49	44	41
1.25	87	77	73	67	64	60	83	75	71	66	62	59	67	63	59	57	57	55	50	47
1.50	92	81	79	72	70	65	88	79	76	70	68	64	72	67	65	61	61	59	55	52
2.00	100	87	89	79	80	73	96	85	86	78	78	72	80	74	73	69	70	67	62	59
2.50	105	90	95	84	87	78	100	88	91	82	84	77	85	78	79	74	74	71	67	64
3.00	108	93	99	87	92	82	103	90	96	85	89	80	89	82	83	78	78	75	71	68
4.00	113	96	106	91	99	87	108	94	101	89	96	86	94	86	89	82	83	79	76	72
5.00	116	98	110	94	104	90	110	96	105	92	100	89	97	88	93	85	87	82	79	75
10.00	122	102	118	100	115	98	116	100	113	98	110	96	104	94	102	92	94	89	86	82

