

東芝照明器具配光データシート


名称	東芝街路照明器具
形名	HG-13811CK

光源	名称	蛍光水銀ランプ
	形名	HF100X
	光束	4200 lm × 1



前面	ガラス (クリアー)
反射面	-

保守率	良	0.73
	中	0.69
	否	0.65

効率	F ◐	45.8 %
	F ◑	37.4 %
	F ○	83.1 %
	器具光束	3490 lm

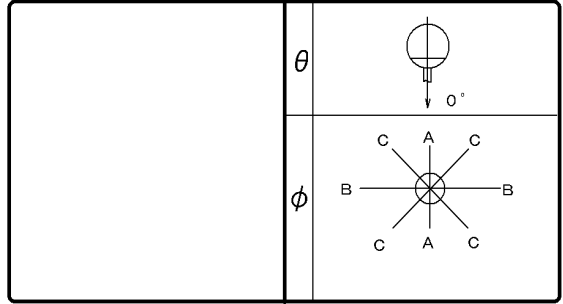

備考

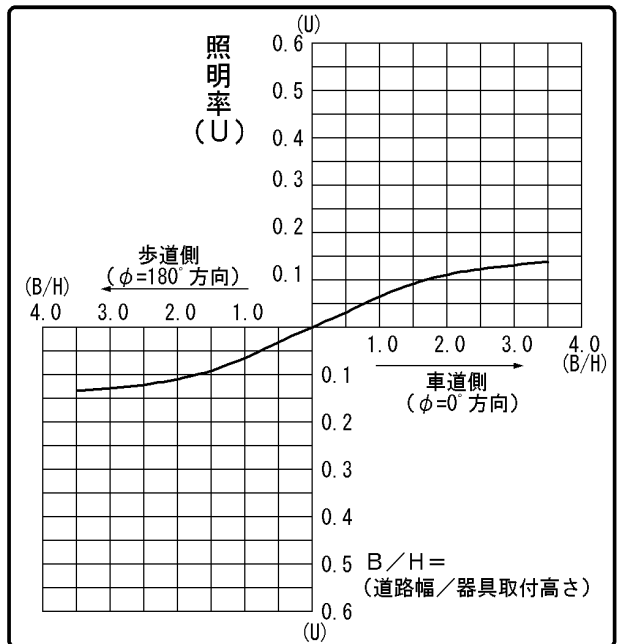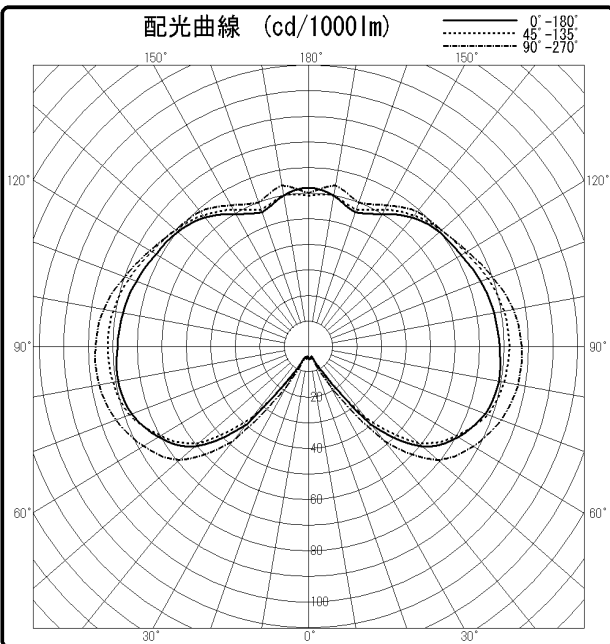

$\theta \backslash \phi$	0°	45°	90°	135°	180°
0°	5	5	5	5	5
10°	4	5	5	5	4
20°	4	5	5	5	4
30°	12	11	19	11	12
40°	40	36	48	36	40
50°	61	59	69	59	61
60°	71	70	78	70	71
70°	77	78	84	78	77
80°	79	81	87	81	79
90°	78	82	87	82	78
100°	77	81	85	81	77
110°	75	78	80	78	75
120°	72	74	75	74	72
130°	70	71	71	71	70
140°	66	67	69	67	66
150°	60	62	64	62	60
160°	56	57	60	57	56
170°	60	60	64	60	60
180°	62	59	60	59	62

