

東芝照明器具配光データシート


名 称	LEDシーリングライト
形 名	LEDH81708-LC

効 率	F 	14 %
	F 	86 %
	F 	100 %
	器具光束	3620 lm

保守率	良	0.63
	中	0.60
	否	0.56

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

前 面	カバー（乳白）
反射面	塗装（白）

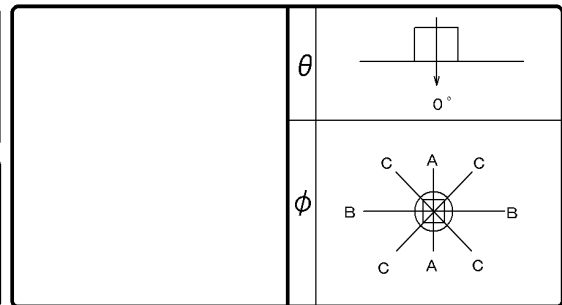

備 考	
--------	--

光度 (cd/1000lm)				反射率 (%)	天井	80						70						50						30		20	0		
$\theta \backslash \phi$	A-A	B-B	C-C		壁	70			50			30			70			50			30			50	30	10	0		
					床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0	
0°	208	208	208		室指数	固有照明率 (×0.01)																							
10°	204	204	204		0.60	58	54	44	42	36	34	56	52	43	41	35	34	40	39	33	32	31	31	26	24				
20°	194	194	194		0.80	70	63	55	52	46	44	67	61	54	51	45	43	50	48	43	41	40	40	35	32				
30°	178	178	178		1.00	77	69	63	58	53	50	73	67	60	56	52	49	56	53	49	47	46	45	40	37				
40°	157	157	157		1.25	85	75	71	65	61	57	80	72	68	63	59	56	63	59	56	53	52	51	46	42				
50°	132	132	132		1.50	89	79	76	69	67	62	85	76	73	67	65	61	68	64	61	58	57	55	50	47				
60°	103	103	103		2.00	98	85	86	77	77	70	93	82	83	75	75	69	76	71	69	66	65	62	57	54				
70°	73	73	73		2.50	102	88	92	81	84	76	97	85	88	79	81	74	81	75	75	70	69	67	62	58				
80°	44	44	44		3.00	106	91	97	85	89	79	101	88	92	82	86	78	85	78	79	74	73	70	65	61				
90°	26	26	26		4.00	111	94	103	89	97	85	105	91	98	87	92	83	90	82	85	79	78	75	70	66				
100°	19	19	19		5.00	114	96	107	92	101	88	108	93	102	89	97	86	93	85	89	82	82	78	73	69				
110°	16	16	16		10.00	120	100	116	98	113	96	114	97	110	95	107	93	100	90	98	89	89	84	81	76				
120°	15	15	15																										
130°	16	16	16																										
140°	17	17	17																										
150°	18	18	18																										
160°	17	17	17																										
170°	16	16	16																										
180°	0	0	0																										

