


東芝照明器具配光データシート

名称	LEDシーリングライト
形名	LEDH82712-LC

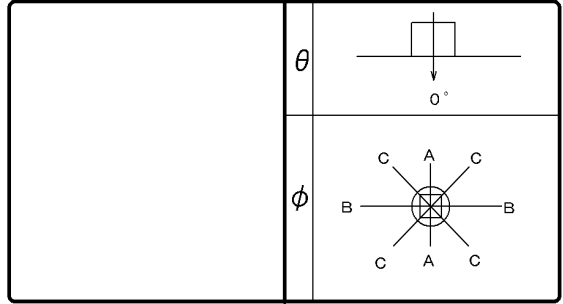

効 率	F $\frac{1}{2}$	13 %
	F $\frac{3}{4}$	87 %
	F \bigcirc	100 %
	器具 光束	5000 lm

保守 率	良	0.63
	中	0.60
	否	0.56

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	211	211	211
10°	208	208	208
20°	200	200	200
30°	185	185	185
40°	166	166	166
50°	141	141	141
60°	112	112	112
70°	81	81	81
80°	51	51	51
90°	30	30	30
100°	21	21	21
110°	16	16	16
120°	14	14	14
130°	14	14	14
140°	15	15	15
150°	16	16	16
160°	15	15	15
170°	14	14	14
180°	0	0	0

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	30	30	10	10	0						
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10					
室指数		固有照明率 (×0.01)																		
0.60	58	53	44	41	35	34	55	51	42	40	34	33	40	38	32	32	31	30	26	23
0.80	69	63	55	51	45	43	66	61	53	50	44	42	50	47	42	41	40	39	34	31
1.00	76	69	62	57	52	50	73	66	60	56	51	48	56	53	48	46	46	44	39	36
1.25	84	75	70	64	60	56	80	72	68	62	58	55	63	59	55	53	52	50	45	42
1.50	89	78	76	69	66	61	85	76	73	67	64	60	67	63	60	57	57	55	50	46
2.00	97	85	86	77	76	70	92	82	82	74	74	68	76	70	69	65	64	62	57	53
2.50	102	88	92	81	83	75	97	85	88	79	80	73	81	74	74	70	69	66	62	58
3.00	106	91	96	84	88	79	100	88	92	82	85	77	84	78	79	73	73	70	65	61
4.00	111	94	103	89	96	84	105	91	98	87	92	82	90	82	85	78	78	75	70	66
5.00	113	96	107	92	101	88	108	93	102	89	97	86	93	85	89	82	82	78	74	69
10.00	120	100	116	98	112	95	114	98	110	95	107	93	100	90	98	89	89	84	81	77

