

東芝照明器具配光データシート


名 称	東芝LED器具
形 名	LED R-44261YNK-LD9

効 率	F 	0 %
	F 	100 %
	F 	100 %
	器具光束	2520 lm

保守率	良	0.81
	中	0.77
	否	0.68

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

前 面	カバー (乳白)
反射面	塗装 (白)

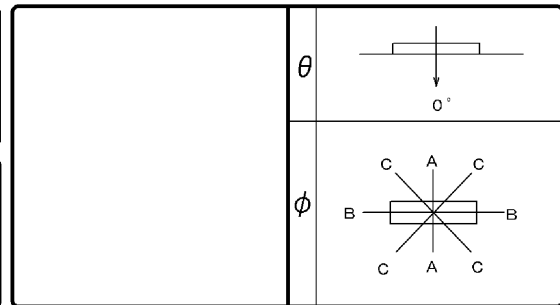

備 考	
--------	--

光度 (cd/1000lm)				反射率 (%)	天井 壁 床	80						70						50						30		20	0				
θ \ φ	A—A	B—B	C—C			70			50			30			70			50			30			50			30			10	0
0°	366	366	366			30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
10°	348	361	360																												
20°	330	340	340	固有照明率 (×0.01)																											
30°	297	307	307	0.60	63	58	49	47	41	40	62	57	49	46	40	39	47	45	40	39	39	38	34	32							
40°	259	265	264	0.80	76	69	62	58	53	51	74	68	61	57	52	50	59	56	51	50	50	49	45	43							
50°	212	214	214	1.00	83	75	70	64	60	57	81	73	68	64	60	57	66	62	58	56	57	55	51	49							
60°	151	156	157	1.25	91	81	78	72	69	65	88	79	76	71	68	64	73	69	66	63	64	62	58	56							
70°	81	93	93	1.50	96	85	84	76	75	70	93	83	82	75	74	69	78	73	71	68	69	67	63	61							
80°	8	33	25	2.00	104	91	94	84	86	78	101	89	91	83	84	78	87	81	81	76	78	75	71	69							
90°	1	1	1	2.50	109	94	100	88	92	83	105	93	97	87	90	82	92	85	86	81	83	80	76	74							
100°	0	0	0	3.00	113	96	104	91	98	87	109	95	101	90	95	86	96	88	91	85	87	83	80	78							
110°	0	0	0	4.00	117	100	110	96	105	92	113	98	107	94	102	91	101	92	97	89	92	88	85	83							
120°	0	0	0	5.00	120	101	114	98	109	95	115	100	111	97	106	94	104	95	100	92	95	91	88	86							
130°	0	0	0	10.00	125	105	122	103	120	102	121	104	118	102	116	101	110	100	109	99	102	97	95	93							
140°	0	0	0																												
150°	0	0	0																												
160°	0	0	0																												
170°	0	0	0																												
180°	0	0	0																												

