

東芝照明器具配光データシート


名 称	東芝LED器具
形 名	LEDR-44401YWK-LD9

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具光束		3820 lm

保守率	良	0.81
	中	0.77
	否	0.68

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

前 面	カバー (乳白)
反射面	塗装 (白)

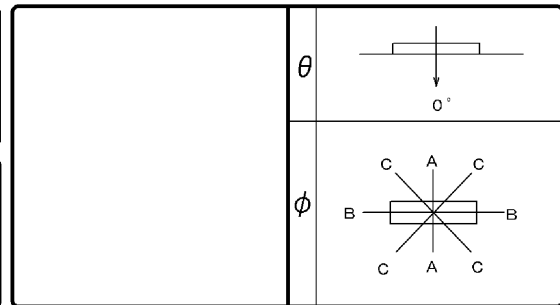

光度 (cd/1000lm)				反射率 (%)	天井	80						70						50				30		20	0
$\theta \backslash \phi$	A-A	B-B	C-C		壁	70			50			30			70			50			30		10	0	
					床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0	
					固有照明率 (×0.01)																				
0°	366	366	366	室指数	0.60	63	58	49	47	41	40	62	57	49	46	40	39	47	45	40	39	39	38	34	32
10°	348	361	360	0.80	76	69	62	58	53	51	74	68	61	57	52	50	59	56	51	50	50	49	45	43	
20°	330	340	340	1.00	83	75	70	64	60	57	81	73	68	64	60	57	66	62	58	56	57	55	51	49	
30°	297	307	307	1.25	91	81	78	72	69	65	88	79	76	71	68	64	73	69	66	63	64	62	58	56	
40°	259	265	264	1.50	96	85	84	76	75	70	93	83	82	75	74	69	78	73	71	68	69	67	63	61	
50°	212	214	214	2.00	104	91	94	84	86	78	101	89	91	83	84	78	87	81	81	76	78	75	71	69	
60°	151	156	157	2.50	109	94	100	88	92	83	105	93	97	87	90	82	92	85	86	81	83	80	76	74	
70°	81	93	93	3.00	113	96	104	91	98	87	109	95	101	90	95	86	96	88	91	85	87	83	80	78	
80°	8	33	25	4.00	117	100	110	96	105	92	113	98	107	94	102	91	101	92	97	89	92	88	85	83	
90°	1	1	1	5.00	120	101	114	98	109	95	115	100	111	97	106	94	104	95	100	92	95	91	88	86	
100°	0	0	0	10.00	125	105	122	103	120	102	121	104	118	102	116	101	110	100	109	99	102	97	95	93	
110°	0	0	0																						
120°	0	0	0																						
130°	0	0	0																						
140°	0	0	0																						
150°	0	0	0																						
160°	0	0	0																						
170°	0	0	0																						
180°	0	0	0																						

