


東芝ランプ 配光データシート

名称	東芝LED電球
形名	LDA9L-H-GU
光束	660 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

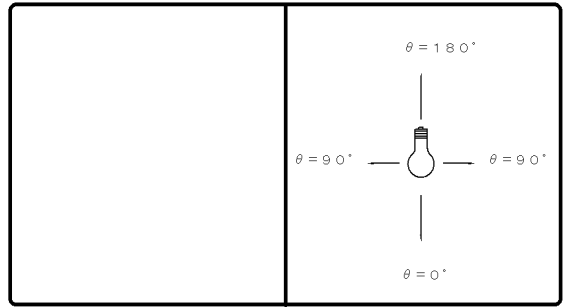

効率	F	%
	F	%
	F	100 %
	器具光束	660 lm

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	269		
10°	261		
20°	242		
30°	217		
40°	186		
50°	153		
60°	123		
70°	95		
80°	71		
90°	52		
100°	38		
110°	28		
120°	21		
130°	16		
140°	12		
150°	9		
160°	7		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20		0						
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0													
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0
室指数	照明率 (×0.01)																													
0.60	56	51	41	39	32	31	53	49	40	38	31	31	37	36	30	29	28	28	23	20										
0.80	66	60	51	48	41	40	63	57	49	46	40	39	46	43	38	37	36	35	30	27										
1.00	75	67	60	55	50	47	71	64	57	54	48	46	53	50	45	44	43	42	36	33										
1.25	82	72	67	62	57	54	77	70	65	60	55	52	60	56	52	50	49	47	42	38										
1.50	87	77	74	67	64	59	83	74	71	65	62	58	65	61	57	55	54	52	46	43										
2.00	95	83	83	74	74	67	90	80	79	72	71	65	73	67	66	62	61	59	53	50										
2.50	100	86	89	79	80	72	95	83	85	76	77	71	78	72	71	67	66	63	58	54										
3.00	104	89	94	82	86	76	98	86	89	80	82	74	81	75	76	70	70	67	62	58										
4.00	108	92	100	87	93	82	102	89	95	84	89	80	86	79	82	75	75	71	67	62										
5.00	111	94	104	90	98	85	105	91	99	87	94	83	90	82	86	79	78	74	70	66										
10.00	118	99	114	96	110	93	112	96	108	93	104	91	97	88	95	86	86	81	78	73										

