

東芝照明器具配光データシート


名 称	LEDシーリングライト
形 名	LEDH81164-LC

効 率	F $\frac{1}{2}$	7 %
	F $\frac{3}{4}$	93 %
	F $\bigcirc$	100 %
器具光束		3860 lm

保守率	良	0.63
	中	0.60
	否	0.56

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

前 面	カバー（乳白）
反射面	塗装（白）

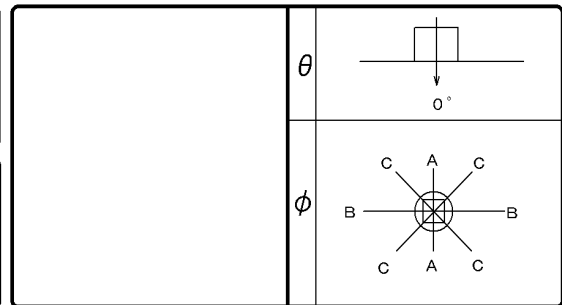

備 考	
-----	--

光度 (cd/1000lm)				反射率 (%)	天井		80						70						50						30			20		0	
$\theta \backslash \phi$	A-A	B-B	C-C		壁	70						50						30						10		0					
						70		50		30		70		50		30		50		30		30		10		0					
						30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	10	0		
0°	330	330	330	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0			
10°	323	323	323	室指数	固有照明率 (×0.01)																										
20°	304	304	304		0.60	61	57	47	45	39	38	59	55	46	44	38	37	44	42	37	36	36	35	31	29						
30°	271	271	271		0.80	73	67	59	55	50	48	71	65	58	54	49	47	55	52	47	46	46	45	40	38						
40°	229	229	229		1.00	80	72	66	62	57	54	77	70	65	60	56	53	61	58	54	52	52	50	46	43						
50°	183	183	183		1.25	88	78	75	68	65	61	84	76	72	67	64	60	68	64	61	58	58	57	52	49						
60°	134	134	134		1.50	93	82	80	73	71	66	89	80	78	71	69	65	73	69	66	63	63	61	56	54						
70°	88	88	88		2.00	101	88	90	80	81	74	97	86	87	79	79	73	81	76	75	71	71	68	64	61						
80°	51	51	51		2.50	105	91	96	84	88	79	101	89	92	83	85	78	86	80	80	75	76	73	69	66						
90°	26	26	26		3.00	109	93	100	88	93	83	104	91	97	86	90	81	90	83	85	79	80	76	72	69						
100°	13	13	13		4.00	114	97	106	92	100	88	109	94	102	90	97	86	95	87	90	84	85	81	77	74						
110°	8	8	8		5.00	116	98	110	95	105	91	111	96	106	93	101	89	98	89	94	87	88	84	80	77						
120°	8	8	8		10.00	122	102	119	100	116	98	117	100	114	98	111	96	105	95	103	93	95	90	87	84						
130°	8	8	8																												
140°	9	9	9																												
150°	9	9	9																												
160°	9	9	9																												
170°	8	8	8																												
180°	0	0	0																												

