

東芝照明器具配光データシート


名 称	LEDシーリングライト
形 名	LEDH81176-LC

効 率	F $\frac{1}{2}$	6 %
	F $\frac{1}{4}$	94 %
	F $\bigcirc$	100 %
器具光束		3700 lm

保守率	良	0.63
	中	0.60
	否	0.56

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

前 面	カバー（乳白）
反射面	塗装（白）

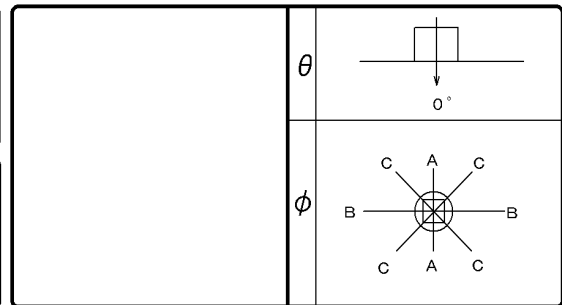

備 考	
-----	--

光度 (cd/1000lm)				反 射 率 (%)	天井 壁 床	80						70						50						30		20	0
$\theta \backslash \phi$	A-A	B-B	C-C			70			50			30			70			50			30			50	30	10	0
0°	333	333	333			30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
10°	326	326	326			30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
20°	305	305	305	室指数		固 有 照 明 率 (×0.01)																					
30°	273	273	273	0.60	62	57	47	45	39	38	59	55	46	44	38	37	44	43	37	36	36	35	31	29			
40°	231	231	231	0.80	73	67	59	56	50	48	71	65	58	54	49	47	55	53	48	46	46	45	40	38			
50°	185	185	185	1.00	80	72	66	62	57	54	77	70	65	60	56	53	61	58	54	52	52	51	46	43			
60°	136	136	136	1.25	88	78	75	68	65	61	85	76	72	67	64	60	68	64	61	59	59	57	52	50			
70°	90	90	90	1.50	93	82	80	73	71	66	89	80	78	71	69	65	73	69	66	63	63	61	57	54			
80°	50	50	50	2.00	101	88	90	80	81	74	97	86	87	79	79	73	82	76	75	71	71	69	64	62			
90°	24	24	24	2.50	106	91	96	85	88	79	101	89	92	83	85	78	86	80	81	75	76	73	69	66			
100°	12	12	12	3.00	109	94	100	88	93	83	105	91	97	86	90	82	90	83	85	79	80	77	73	70			
110°	8	8	8	4.00	114	97	107	92	100	88	109	95	103	90	97	87	95	87	91	84	85	81	78	75			
120°	7	7	7	5.00	117	99	110	95	105	91	112	97	106	93	101	90	98	90	95	87	88	84	81	78			
130°	8	8	8	10.00	123	103	119	100	116	98	117	101	114	99	111	97	105	95	103	94	96	90	88	85			
140°	8	8	8																								
150°	8	8	8																								
160°	8	8	8																								
170°	7	7	7																								
180°	0	0	0																								

