

東芝照明器具配光データシート


名 称	LEDシーリングライト
形 名	LEDH81598N-LC

効 率	F 	8 %
	F 	92 %
	F 	100 %
	器具光束	3460 lm

保守率	良	0.63
	中	0.60
	否	0.56

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

前 面	カバー（乳白）
反射面	塗装（白）

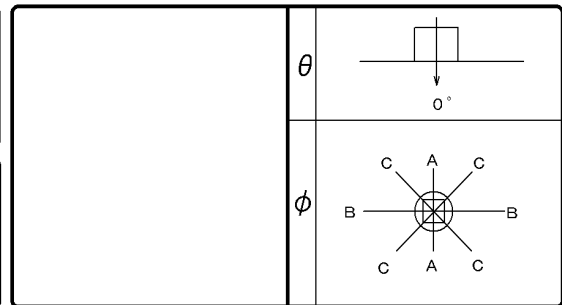

備 考	
--------	--

光度 (cd/1000lm)				反射率 (%)	天井	80						70						50						30		20	0					
$\theta \backslash \phi$	A-A	B-B	C-C			壁	70			50			30			70			50			30			50		30		10	0		
							30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0	0
室指数				固有照明率 (×0.01)																												
0°	310	310	310	0.60	61	56	47	44	38	37	59	54	46	43	38	36	43	42	36	35	35	34	30	28								
10°	305	305	305	0.80	73	66	59	55	49	47	70	64	57	54	48	47	54	52	47	45	45	44	39	37								
20°	291	291	291	1.00	80	72	66	61	56	54	77	70	64	60	55	53	60	57	53	51	51	50	45	42								
30°	265	265	265	1.25	87	78	74	68	65	61	84	75	72	66	63	60	68	64	60	58	57	56	51	48								
40°	229	229	229	1.50	92	81	80	72	70	65	88	79	77	71	69	64	72	68	65	62	62	60	55	53								
50°	184	184	184	2.00	101	87	89	80	81	74	96	85	86	78	78	72	81	75	74	70	70	68	63	60								
60°	135	135	135	2.50	105	91	95	84	87	79	100	88	92	82	85	77	85	79	80	75	75	72	68	65								
70°	86	86	86	3.00	109	93	100	87	92	83	104	91	96	86	89	81	89	82	84	78	79	75	71	68								
80°	48	48	48	4.00	113	96	106	92	100	88	108	94	102	90	96	86	94	86	90	83	84	80	76	73								
90°	23	23	23	5.00	116	98	110	94	104	91	111	96	105	92	101	89	97	89	93	86	87	83	79	76								
100°	12	12	12	10.00	122	102	119	100	115	98	116	100	113	98	110	96	104	94	102	92	94	89	86	83								
110°	12	12	12																													
120°	13	13	13																													
130°	13	13	13																													
140°	13	13	13																													
150°	13	13	13																													
160°	12	12	12																													
170°	10	10	10																													
180°	0	0	0																													

