

東芝照明器具配光データシート


名 称	LEDシーリングライト
形 名	LEDH81636N-LC

効 率	F 	10 %
	F 	90 %
	F 	100 %
	器具光束	3740 lm

保守率	良	0.63
	中	0.60
	否	0.56

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

前 面	カバー（乳白）
反射面	塗装（白）

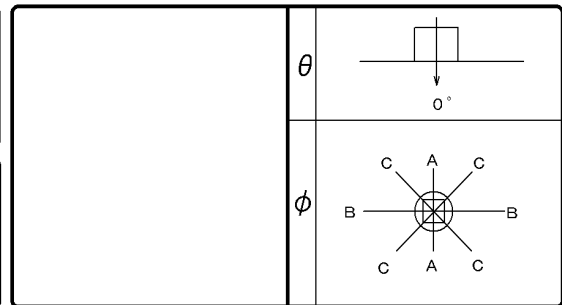

備 考	
--------	--

光度 (cd/1000lm)				反射率 (%)	天井 壁 床	80						70						50				30		20	0
$\theta \backslash \phi$	A-A	B-B	C-C			70			50			30			70			50			30			10	0
0°	293	293	293			30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
10°	288	288	288																						
20°	274	274	274	固有照明率 (×0.01)																					
30°	250	250	250	0.60	60	55	46	43	37	36	58	53	44	42	36	35	42	40	35	34	34	33	28	26	
40°	219	219	219	0.80	72	65	57	54	48	46	69	63	56	52	47	45	52	50	45	44	43	42	37	35	
50°	178	178	178	1.00	79	71	64	60	55	52	75	68	62	58	54	51	59	56	51	49	49	48	43	40	
60°	134	134	134	1.25	86	77	73	67	63	59	82	74	70	65	61	58	66	62	58	56	55	54	49	46	
70°	91	91	91	1.50	91	80	78	71	69	64	87	78	76	69	67	63	71	66	63	60	60	58	53	50	
80°	54	54	54	2.00	99	86	88	79	79	72	95	84	85	77	77	71	79	73	72	68	68	66	61	58	
90°	31	31	31	2.50	104	90	94	83	86	77	99	87	90	81	83	76	84	77	78	73	73	70	65	62	
100°	18	18	18	3.00	108	92	99	86	91	81	103	90	95	84	88	79	87	80	82	76	77	73	69	66	
110°	15	15	15	4.00	112	95	105	91	98	86	107	93	100	89	95	85	92	85	88	81	82	78	74	70	
120°	14	14	14	5.00	115	97	109	93	103	90	110	95	104	91	99	88	96	87	92	84	85	81	77	74	
130°	13	13	13	10.00	121	101	118	99	114	97	115	99	112	97	109	95	103	93	100	91	92	87	84	80	
140°	13	13	13																						
150°	13	13	13																						
160°	12	12	12																						
170°	11	11	11																						
180°	0	0	0																						

