


東芝照明器具配光データシート

名称	LEDシーリングライト
形名	LEDH81743-LC

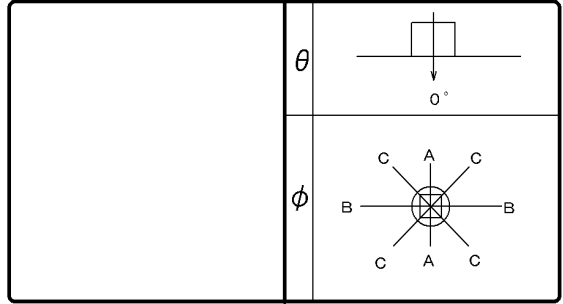

効 率	F $\frac{1}{2}$	13%
	F $\frac{3}{4}$	87%
	F \bigcirc	100%
	器具光束	3640 lm

保守率	良	0.63
	中	0.60
	否	0.56

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	281	281	281
10°	276	276	276
20°	263	263	263
30°	241	241	241
40°	211	211	211
50°	175	175	175
60°	134	134	134
70°	89	89	89
80°	49	49	49
90°	23	23	23
100°	18	18	18
110°	19	19	19
120°	20	20	20
130°	22	22	22
140°	23	23	23
150°	24	24	24
160°	22	22	22
170°	20	20	20
180°	0	0	0

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	30	30	10	0							
	床	30	10	30	10	30	10	30	10	30	10	30	10	0						
室指数	固有照明率 (×0.01)																			
0.60	59	55	45	43	37	35	57	53	44	42	36	35	41	40	34	33	33	32	28	25
0.80	71	64	57	53	47	45	68	62	55	52	46	45	51	49	44	43	42	41	36	34
1.00	78	70	64	59	54	52	74	68	62	58	53	51	58	55	50	49	48	47	42	39
1.25	86	76	72	66	63	59	82	73	70	64	61	57	65	61	57	55	54	53	48	44
1.50	91	80	78	71	68	64	86	77	75	69	66	62	69	65	62	60	59	57	52	49
2.00	99	86	88	78	79	72	94	83	84	76	76	70	78	72	71	67	67	64	59	56
2.50	103	89	93	83	85	77	98	86	90	80	82	75	82	76	77	72	71	69	64	60
3.00	107	92	98	86	91	81	102	89	94	84	87	79	86	79	81	75	75	72	68	64
4.00	112	95	104	90	98	86	106	92	100	88	94	84	91	83	87	80	80	76	72	68
5.00	115	97	108	93	103	89	109	94	103	91	98	87	94	86	91	83	83	79	75	71
10.00	121	101	117	99	114	97	115	98	111	96	109	94	101	91	99	90	91	86	82	78

