


# 東芝照明器具配光データシート

名称	LEDシーリングライト
形名	LEDH82116N-LC

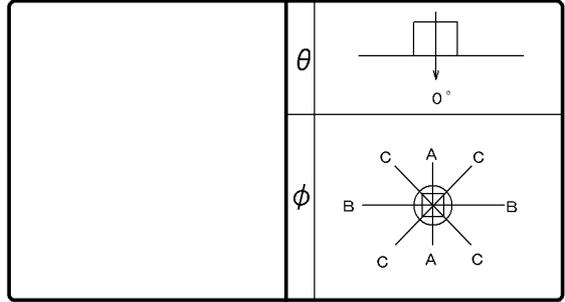

効 率	F	15 %
	F	85 %
	F	100 %
器具 光束		4510 lm

保守 率	良	0.63
	中	0.60
	否	0.56

前面	カバー（透明・シルク印刷付き）
反射面	塗装（白）

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	205	205	205
10°	202	202	202
20°	192	192	192
30°	176	176	176
40°	154	154	154
50°	129	129	129
60°	100	100	100
70°	73	73	73
80°	48	48	48
90°	31	31	31
100°	22	22	22
110°	18	18	18
120°	17	17	17
130°	17	17	17
140°	17	17	17
150°	17	17	17
160°	15	15	15
170°	13	13	13
180°	0	0	0

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	30	30	10	10	0						
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0			
室指数	固有照明率 (×0.01)																			
0.60	58	54	44	42	35	34	56	52	42	41	34	33	40	38	33	32	31	30	26	23
0.80	70	63	55	52	46	44	66	61	53	50	44	43	50	47	42	41	40	39	34	31
1.00	77	69	62	58	53	50	73	66	60	56	51	49	56	53	48	46	45	44	39	36
1.25	84	75	70	64	60	57	80	72	68	63	59	55	62	59	55	53	52	50	45	41
1.50	89	78	76	69	66	62	84	75	73	67	64	60	67	63	60	57	56	54	49	45
2.00	97	85	86	76	77	70	92	82	82	74	74	68	75	70	69	65	64	61	56	52
2.50	102	88	92	81	83	75	97	85	87	78	80	73	80	74	74	69	68	66	61	57
3.00	106	90	96	84	88	79	100	87	92	82	85	77	84	77	78	73	72	69	64	60
4.00	110	94	103	89	96	84	104	91	98	86	92	82	89	81	84	78	77	74	69	65
5.00	113	96	107	91	101	87	107	93	101	89	96	85	92	84	88	81	80	76	72	68
10.00	120	100	116	97	112	95	113	97	110	95	107	93	99	89	97	88	88	83	79	75

