

東芝照明器具配光データシート


名 称	LEDシーリングライト
形 名	LEDH82598N-LC

効 率	F 	8 %
	F 	92 %
	F 	100 %
	器具 光束	4510 lm

保守 率	良	0.63
	中	0.60
	否	0.56

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

前 面	カバー（乳白）
反射面	塗装（白）

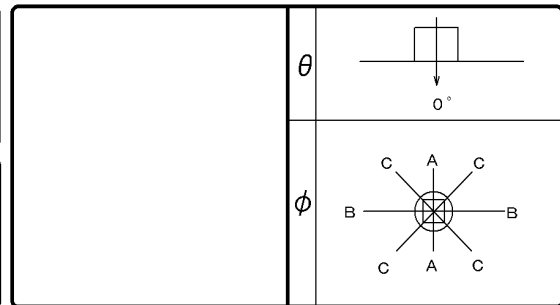

備 考	
--------	--

光度 (cd/1000lm)				反射率 (%)	天井 壁 床	80						70						50						30		20	0
θ\φ	A-A	B-B	C-C			70		50		30		70		50		30		50		30		30		10	0		
0°	310	310	310			30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0	
10°	305	305	305																								
20°	291	291	291	固有照明率 (×0.01)																							
30°	265	265	265	0.60	61	56	47	44	38	37	59	54	46	43	38	36	43	42	36	35	35	34	30	28			
40°	229	229	229	0.80	73	66	59	55	49	47	70	64	57	54	48	47	54	52	47	45	45	44	39	37			
50°	184	184	184	1.00	80	72	66	61	56	54	77	70	64	60	55	53	60	57	53	51	51	50	45	42			
60°	135	135	135	1.25	87	78	74	68	65	61	84	75	72	66	63	60	68	64	60	58	57	56	51	48			
70°	86	86	86	1.50	92	81	80	72	70	65	88	79	77	71	69	64	72	68	65	62	62	60	55	53			
80°	48	48	48	2.00	101	87	89	80	81	74	96	85	86	78	78	72	81	75	74	70	70	68	63	60			
90°	23	23	23	2.50	105	91	95	84	87	79	100	88	92	82	85	77	85	79	80	75	75	72	68	65			
100°	12	12	12	3.00	109	93	100	87	92	83	104	91	96	86	89	81	89	82	84	78	79	75	71	68			
110°	12	12	12	4.00	113	96	106	92	100	88	108	94	102	90	96	86	94	86	90	83	84	80	76	73			
120°	13	13	13	5.00	116	98	110	94	104	91	111	96	105	92	101	89	97	89	93	86	87	83	79	76			
130°	13	13	13	10.00	122	102	119	100	115	98	116	100	113	98	110	96	104	94	102	92	94	89	86	83			
140°	13	13	13																								
150°	13	13	13																								
160°	12	12	12																								
170°	10	10	10																								
180°	0	0	0																								

