


東芝照明器具配光データシート

名称	LEDシーリングライト
形名	LEDH82605N-LC

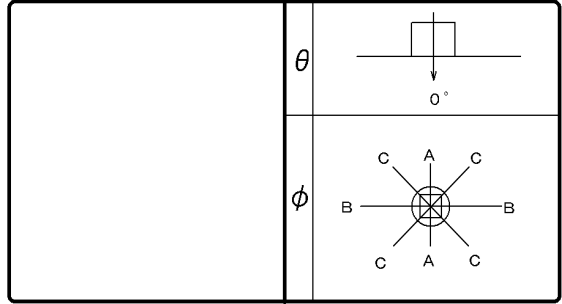

効 率	F	13%
	F	87%
	F	100%
	器具光束	4510 lm

保守率	良	0.63
	中	0.60
	否	0.56

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	282	282	282
10°	277	277	277
20°	265	265	265
30°	242	242	242
40°	210	210	210
50°	172	172	172
60°	130	130	130
70°	89	89	89
80°	53	53	53
90°	29	29	29
100°	19	19	19
110°	18	18	18
120°	19	19	19
130°	20	20	20
140°	22	22	22
150°	22	22	22
160°	20	20	20
170°	18	18	18
180°	0	0	0

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	30	30	10	0							
	床	30	10	30	10	30	10	30	10	30	10	30	10	0						
室指数		固有照明率 (×0.01)																		
0.60	59	55	45	43	37	35	57	53	44	42	36	35	41	40	34	33	33	32	28	25
0.80	71	64	57	53	47	45	68	62	55	52	46	45	52	49	44	43	42	41	36	34
1.00	78	70	64	59	54	52	74	68	62	58	53	51	58	55	50	48	48	46	42	39
1.25	86	76	72	66	62	58	82	73	69	64	61	57	65	61	57	55	54	53	47	44
1.50	90	80	78	70	68	63	86	77	75	69	66	62	69	65	62	59	59	57	52	48
2.00	99	86	87	78	78	72	94	83	84	76	76	70	77	72	71	67	66	64	59	56
2.50	103	89	93	82	85	77	98	86	89	80	82	75	82	76	76	72	71	68	64	60
3.00	107	92	98	86	90	81	102	89	94	83	87	79	86	79	81	75	75	72	67	63
4.00	112	95	104	90	98	86	106	92	99	88	94	84	91	83	86	80	80	76	72	68
5.00	114	97	108	93	102	89	109	94	103	90	98	87	94	86	90	83	83	79	75	71
10.00	121	101	117	98	113	96	114	98	111	96	108	94	101	91	99	90	90	85	82	78

