

東芝照明器具配光データシート


名 称	LEDシーリングライト
形 名	LEDH82648N-LC

効 率	F 	100 %
	F 	90 %
	F 	100 %
	器具光束	4640 lm

保守率	良	0.63
	中	0.60
	否	0.56

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

前 面	カバー（乳白）
反射面	塗装（白）

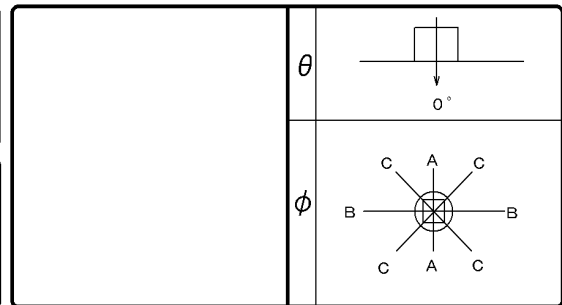

備 考	
--------	--

光度 (cd/1000lm)				反射率 (%)	天井	80						70						50				30		20	0									
$\theta \backslash \phi$	A-A	B-B	C-C			壁	70			50			30			70			50			30			50		30		10		0			
							30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	20	0
室指数				固有照明率 (×0.01)																														
0°				0.60	60	56	46	44	38	37	58	54	45	43	37	36	43	41	36	35	34	34	29	27										
10°				0.80	72	66	58	54	49	47	69	64	56	53	48	46	53	51	46	45	44	43	38	36										
20°				1.00	79	71	65	61	56	53	76	69	63	59	55	52	60	56	52	50	50	49	44	41										
30°				1.25	87	77	73	67	64	60	83	75	71	66	62	59	67	63	59	57	56	55	50	47										
40°				1.50	92	81	79	72	70	65	88	78	76	70	68	64	71	67	64	61	61	59	54	51										
50°				2.00	100	87	89	79	80	73	95	84	86	77	78	72	79	74	73	69	69	66	62	58										
60°				2.50	104	90	95	84	87	78	100	88	91	82	84	76	84	78	78	73	74	71	66	63										
70°				3.00	108	93	99	87	92	82	103	90	95	85	89	80	88	81	83	77	77	74	70	66										
80°				4.00	113	96	105	91	99	87	107	93	101	89	95	85	93	85	89	82	82	78	75	71										
90°				5.00	115	98	109	94	104	90	110	95	105	92	100	88	96	87	92	85	85	81	78	74										
100°				10.00	121	102	118	99	115	97	116	99	113	97	110	95	103	93	101	91	93	87	84	81										
110°																																		
120°																																		
130°																																		
140°																																		
150°																																		
160°																																		
170°																																		
180°																																		

