

東芝照明器具配光データシート


名 称	LEDシーリングライト
形 名	LEDH82753-LC

効 率	F 	17 %
	F 	83 %
	F 	100 %
	器具光束	4530 lm

保守率	良	0.63
	中	0.60
	否	0.56

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

前 面	カバー（乳白）
反射面	塗装（白）

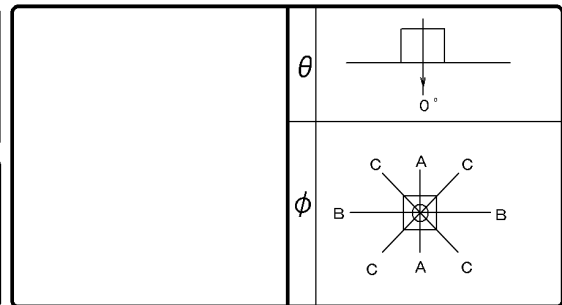

備 考	
--------	--

光度 (cd/1000lm)				反 射 率 (%)	天井 壁 床	80						70						50						30		20	0			
$\theta \backslash \phi$	A-A	B-B	C-C			70			50			30			70			50			30			50	30	30	10	0		
0°	279	279	279			30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
10°	274	274	274			30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
20°	260	260	260	固 有 照 明 率 (×0.01)																										
30°	236	236	236	室指数																										
40°	205	205	205	0.60	59	55	45	43	37	36	57	52	44	42	36	35	41	39	34	33	32	32	27	25						
50°	167	167	167	0.80	71	64	57	53	48	46	68	62	55	52	46	45	51	49	44	43	41	41	36	33						
60°	125	125	125	1.00	78	70	64	59	55	52	74	67	62	58	53	51	57	54	50	48	47	46	41	38						
70°	82	82	82	1.25	85	76	72	66	63	59	81	73	69	64	61	57	64	60	57	54	53	52	47	43						
80°	43	43	43	1.50	90	79	78	71	69	64	86	77	75	68	66	62	69	64	62	59	58	56	51	47						
90°	20	20	20	2.00	98	86	87	78	79	72	93	82	84	76	76	70	77	71	70	66	65	63	58	54						
100°	18	18	18	2.50	103	89	93	82	85	77	97	86	89	80	82	75	81	75	76	71	70	67	62	58						
110°	23	23	23	3.00	106	91	98	86	90	81	101	88	93	83	87	79	85	78	80	74	73	70	66	61						
120°	27	27	27	4.00	111	94	104	90	98	86	105	91	99	87	93	84	90	82	85	79	78	75	70	66						
130°	31	31	31	5.00	114	96	108	92	102	89	108	93	102	90	98	87	93	84	89	82	81	77	73	69						
140°	35	35	35	10.00	120	100	116	98	113	96	113	97	110	95	107	93	99	90	97	88	88	83	80	75						
150°	36	36	36																											
160°	35	35	35																											
170°	31	31	31																											
180°	0	0	0																											

