

東芝照明器具配光データシート


名 称	LEDシーリングライト
形 名	LEDH82759-LC

効 率	F 	3 %
	F 	97 %
	F 	100 %
	器具 光束	4550 lm

保守 率	良	0.63
	中	0.60
	否	0.56

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

前 面	カバー（乳白）
反射面	塗装（白）

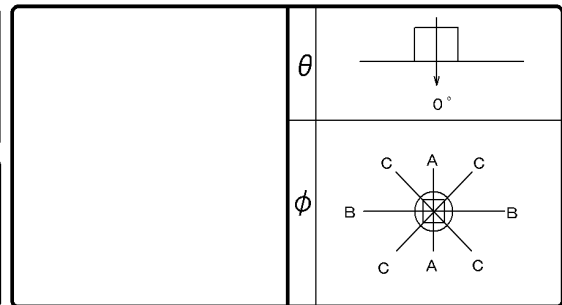

備 考	
--------	--

光度 (cd/1000lm)				反 射 率 (%)	天 井 壁 床	80						70						50						30			20	0			
$\theta \backslash \phi$	A-A	B-B	C-C			70			50			30			70			50			30			50			30			10	0
						30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0	
0°		313	313	313	固 有 照 明 率 (×0.01)																										
10°		308	308	308	室指数																										
20°		294	294	294	0.60	61	56	46	44	38	37	59	55	46	43	37	36	44	42	36	35	35	35	30	28						
30°		270	270	270	0.80	73	66	58	55	49	47	70	65	57	54	48	46	55	52	47	46	46	45	40	38						
40°		238	238	238	1.00	80	72	66	61	56	53	77	70	64	60	55	53	61	58	54	52	52	51	46	43						
50°		198	198	198	1.25	88	78	74	68	65	61	85	76	72	67	63	60	69	65	61	58	59	57	52	50						
60°		151	151	151	1.50	93	82	80	73	71	66	89	80	78	71	69	65	74	69	66	63	64	62	57	55						
70°		101	101	101	2.00	101	88	90	81	81	74	97	86	87	79	79	73	82	77	76	72	72	70	65	63						
80°		51	51	51	2.50	106	92	96	85	88	79	102	90	93	84	86	78	87	81	82	76	78	74	70	68						
90°		12	12	12	3.00	110	94	101	88	93	83	105	92	98	87	91	82	91	84	86	80	82	78	74	72						
100°		3	3	3	4.00	115	97	107	93	101	89	110	96	104	91	98	88	97	89	92	85	87	83	80	77						
110°		4	4	4	5.00	117	99	111	96	106	92	113	98	107	94	102	91	100	91	96	88	91	86	83	80						
120°		4	4	4	10.00	124	103	120	101	117	99	119	102	116	100	113	98	107	97	105	95	98	93	90	88						
130°		5	5	5																											
140°		6	6	6																											
150°		7	7	7																											
160°		7	7	7																											
170°		6	6	6																											
180°		0	0	0																											

