

東芝照明器具配光データシート


名 称	LEDシーリングライト
形 名	LEDH82760-LC

効 率	F 	3 %
	F 	97 %
	F 	100 %
	器具 光束	4550 lm

保守 率	良	0.63
	中	0.60
	否	0.56

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

前 面	カバー（乳白）
反射面	塗装（白）

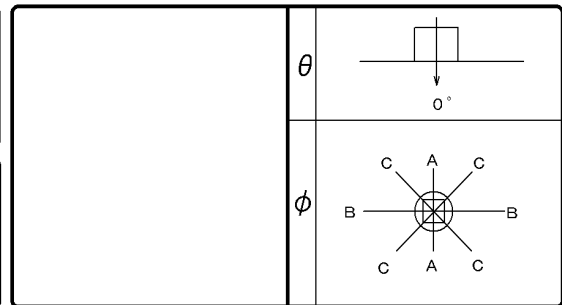

備 考	
--------	--

光度 (cd/1000lm)				反射率 (%)	天井 壁 床	80						70						50				30		20	0		
θ\φ	A-A	B-B	C-C			70			50			30			70		50		30		50	30	30	10	0		
0°	313	313	313			30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0	
10°	308	308	308																								
20°	294	294	294																								
30°	270	270	270																								
40°	238	238	238																								
50°	198	198	198																								
60°	151	151	151																								
70°	101	101	101																								
80°	51	51	51																								
90°	12	12	12																								
100°	3	3	3																								
110°	4	4	4																								
120°	4	4	4																								
130°	5	5	5																								
140°	6	6	6																								
150°	7	7	7																								
160°	7	7	7																								
170°	6	6	6																								
180°	0	0	0																								
室指数				固有照明率 (×0.01)																							
0.60				61	56	46	44	38	37	59	55	46	43	37	36	44	42	36	35	35	35	30	28				
0.80				73	66	58	55	49	47	70	65	57	54	48	46	55	52	47	46	46	45	40	38				
1.00				80	72	66	61	56	53	77	70	64	60	55	53	61	58	54	52	52	51	46	43				
1.25				88	78	74	68	65	61	85	76	72	67	63	60	69	65	61	58	59	57	52	50				
1.50				93	82	80	73	71	66	89	80	78	71	69	65	74	69	66	63	64	62	57	55				
2.00				101	88	90	81	81	74	97	86	87	79	79	73	82	77	76	72	72	70	65	63				
2.50				106	92	96	85	88	79	102	90	93	84	86	78	87	81	82	76	78	74	70	68				
3.00				110	94	101	88	93	83	105	92	98	87	91	82	91	84	86	80	82	78	74	72				
4.00				115	97	107	93	101	89	110	96	104	91	98	88	97	89	92	85	87	83	80	77				
5.00				117	99	111	96	106	92	113	98	107	94	102	91	100	91	96	88	91	86	83	80				
10.00				124	103	120	101	117	99	119	102	116	100	113	98	107	97	105	95	98	93	90	88				

